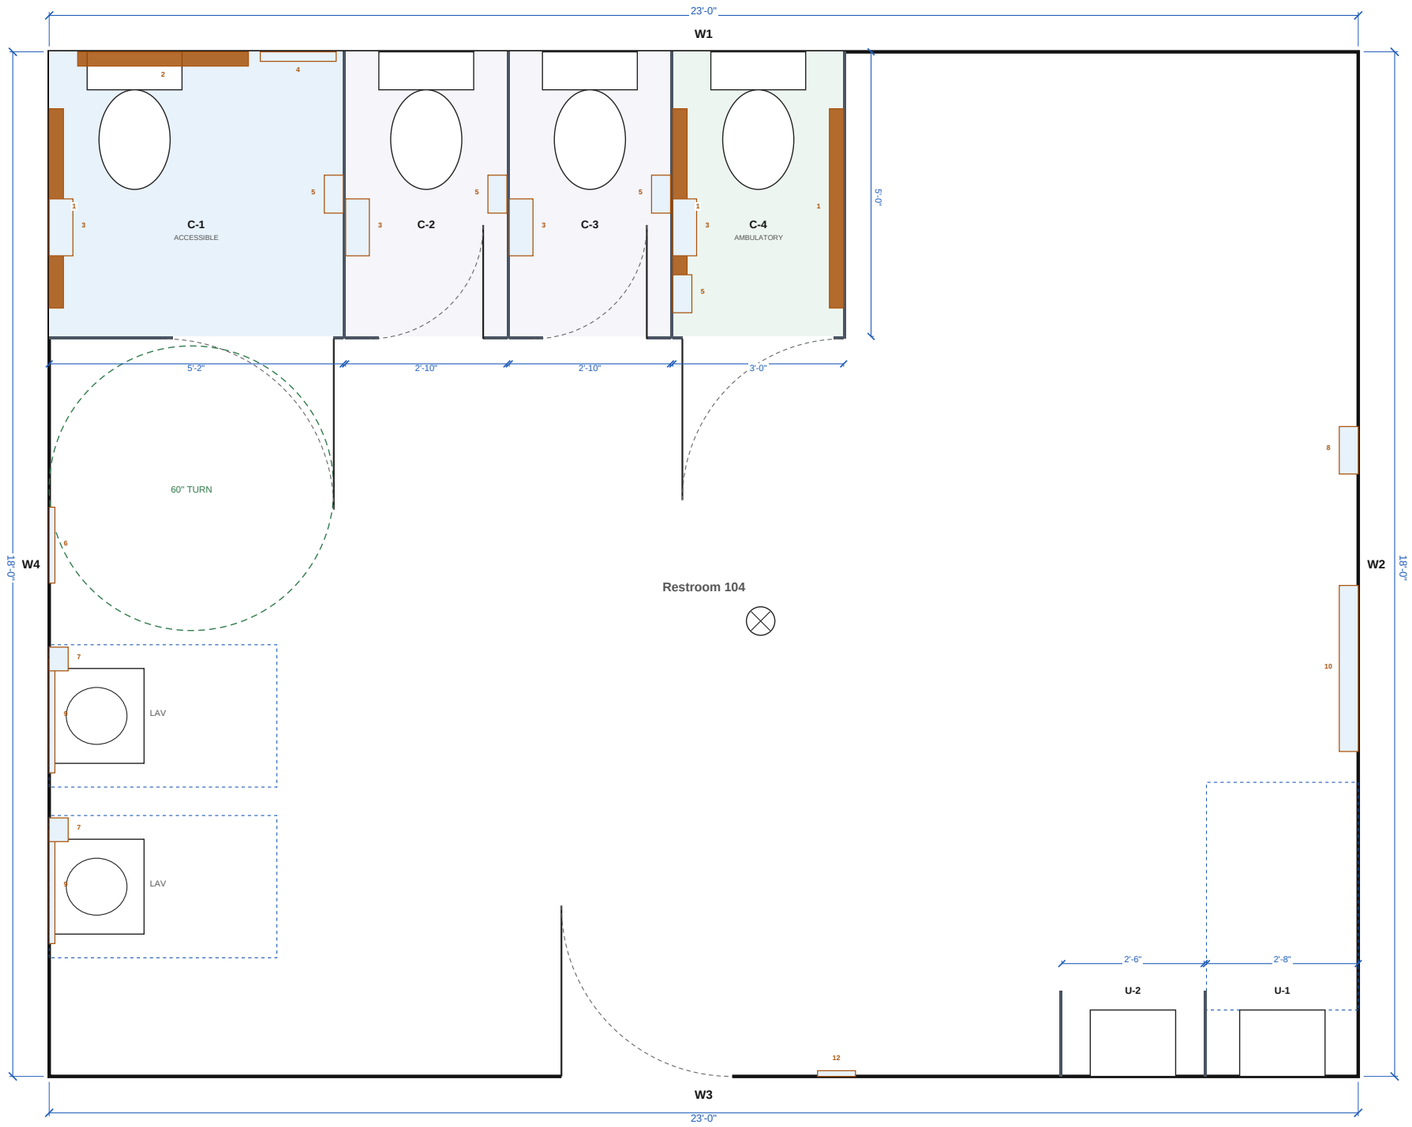


1 TOILET ROOM PLAN

SCALE: 3/8" = 1'-0"

- 60 in. turning circle (one place it fits)
- Clear floor spaces and the water closet clearance
- Partitions, pilasters and urinal screens
- Accessory on the wall (number = TA tag)
- Door swing
- **C-1** C-1 compartment, U-1 urinal bay, W1 wall (compartment schedule)

PREPARED BY

PROJECT

Sample Office Building, Restroom
104
Client: Sample General Contractor

NOTICE

CHECKS AND LAYOUT ONLY.
Not an engineered design. The accessibility checks flag the dimensions of the codes turned on; they are not a certification or a plan review. Verify in the field; install per the makers' instructions.

REVISIONS

REV	DATE	DESCRIPTION
0	11/3/2026	Issued for review

DATE
11/3/2026

SCALE
3/8" = 1'-0"

DRAWN BY

SHEET SIZE
ANSI B (11" x 17")


SHEET TITLE
TOILET ROOM PLAN

A10-1




1 RESTROOM 104 W1: COMPARTMENT FRONT (FLOOR-MOUNTED, OVERHEAD-BRACED, PHENOLIC)

SCALE: 3/8" = 1'-0"

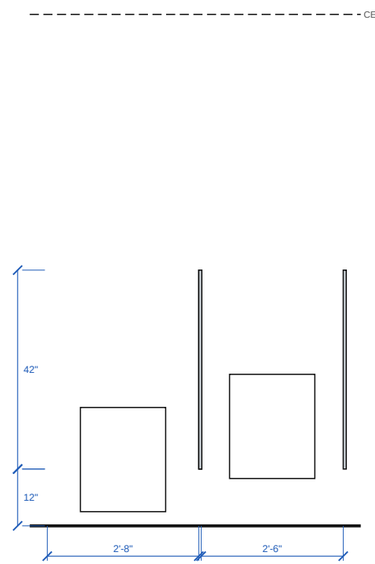


2 RESTROOM 104 W3: COMPARTMENT FRONT (WALL-HUNG, PHENOLIC)

SCALE: 3/8" = 1'-0"

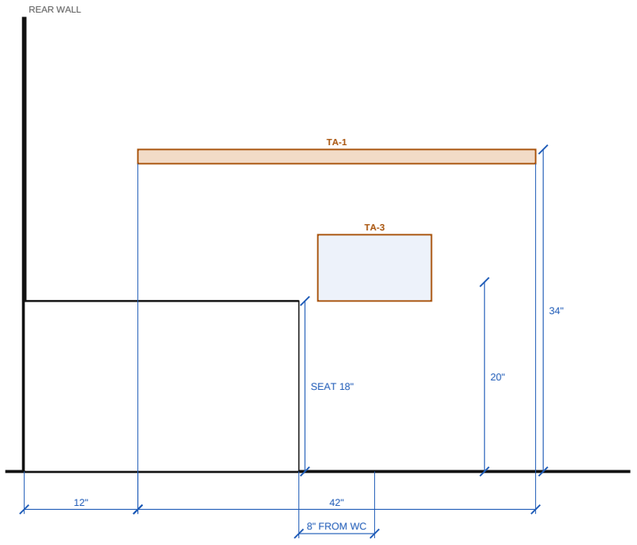

3 C-1 LEFT SIDE WALL: GRAB BARS AND TOILET PAPER

SCALE: 3/4" = 1'-0"

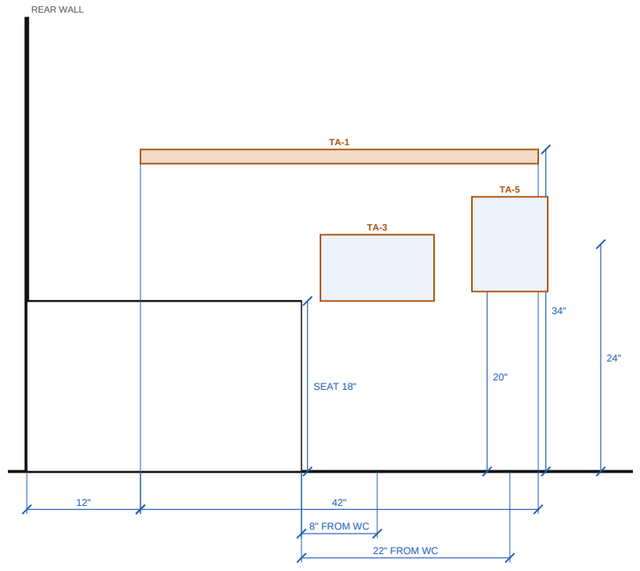

4 C-4 LEFT SIDE PANEL: GRAB BARS AND TOILET PAPER

SCALE: 3/4" = 1'-0"

PREPARED BY

PROJECT

Sample Office Building, Restroom
104
Client: Sample General Contractor

NOTICE

CHECKS AND LAYOUT ONLY.
Not an engineered design. The accessibility checks flag the dimensions of the codes turned on; they are not a certification or a plan review. Verify in the field; install per the makers' instructions.

REVISIONS

REV	DATE	DESCRIPTION
0	11/3/2026	Issued for review

DATE
11/3/2026


SCALE
As noted

DRAWN BY

SHEET SIZE
ANSI B (11" x 17")

SHEET TITLE
PARTITION ELEVATIONS

A10-2

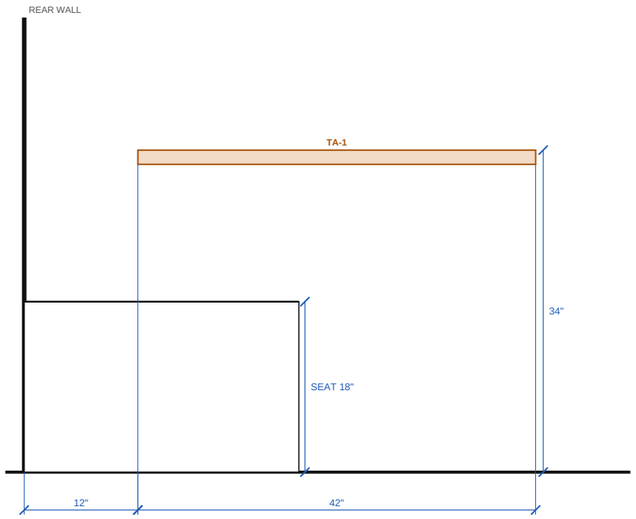

1 **C-4 RIGHT SIDE PANEL: GRAB BARS AND TOILET PAPER**

SCALE: 3/4" = 1'-0"

PREPARED BY

PROJECT

Sample Office Building, Restroom
104
Client: Sample General Contractor

NOTICE

CHECKS AND LAYOUT ONLY.
Not an engineered design. The accessibility checks flag the dimensions of the codes turned on; they are not a certification or a plan review. Verify in the field; install per the makers' instructions.

REVISIONS

REV	DATE	DESCRIPTION
0	11/3/2026	Issued for review

DATE
11/3/2026


SCALE
As noted

DRAWN BY

SHEET SIZE
ANSI B (11" x 17")


SHEET TITLE
PARTITION ELEVATIONS

A10-3

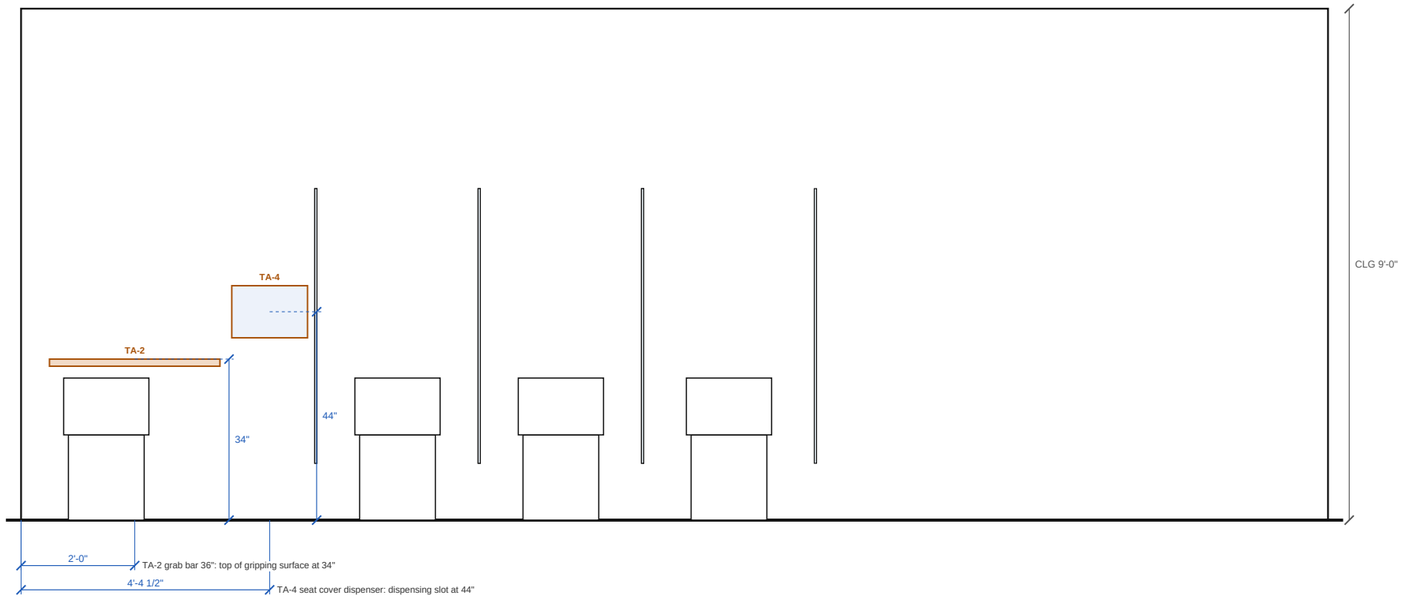

1 MOUNTING ELEVATION: RESTROOM 104 W1

SCALE: 3/8" = 1'-0"

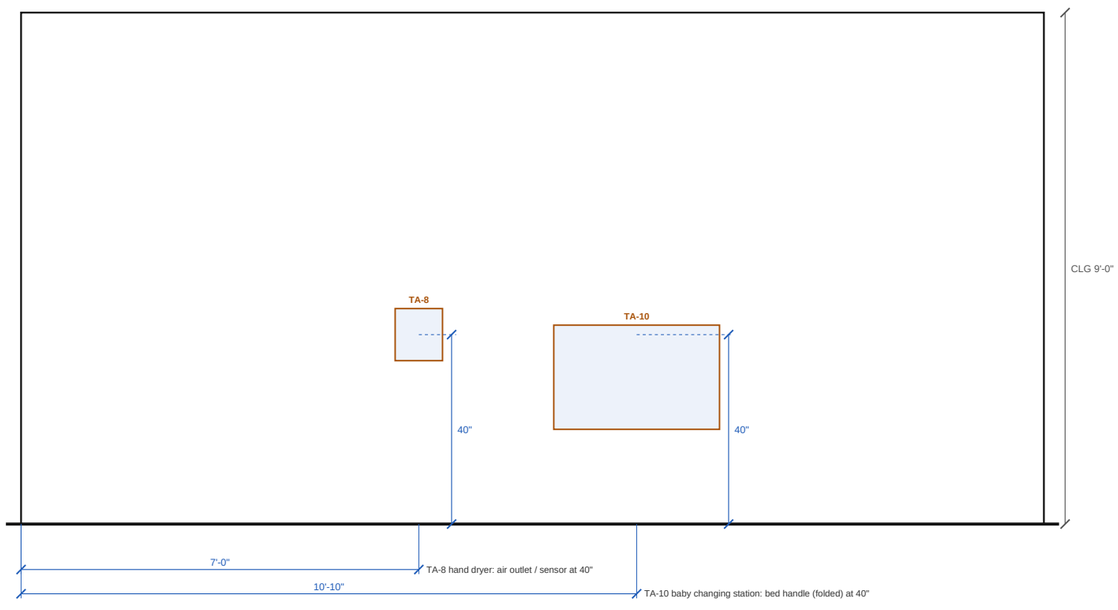

2 MOUNTING ELEVATION: RESTROOM 104 W2

SCALE: 3/8" = 1'-0"

PREPARED BY

PROJECT

Sample Office Building, Restroom
104
Client: Sample General Contractor

NOTICE

CHECKS AND LAYOUT ONLY.
Not an engineered design. The accessibility checks flag the dimensions of the codes turned on; they are not a certification or a plan review. Verify in the field; install per the makers' instructions.

REVISIONS

REV	DATE	DESCRIPTION
0	11/3/2026	Issued for review

DATE
11/3/2026


SCALE
3/8" = 1'-0"

DRAWN BY

SHEET SIZE
ANSI B (11" x 17")

SHEET TITLE
MOUNTING ELEVATIONS

A10-4

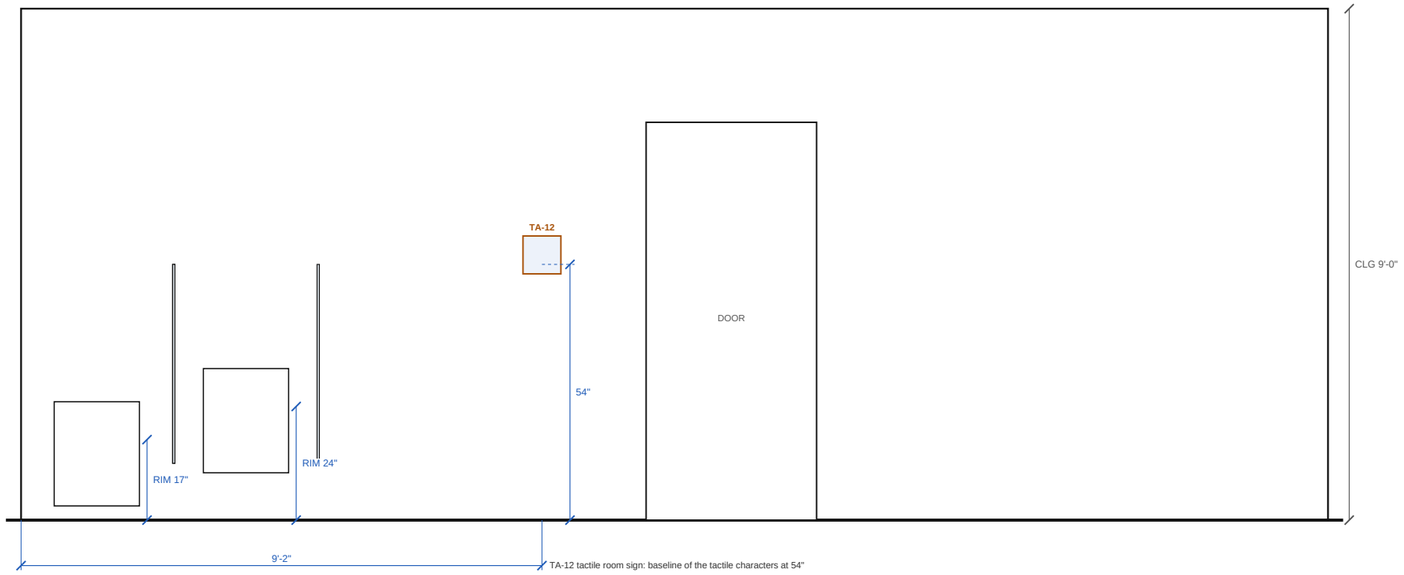

1

MOUNTING ELEVATION: RESTROOM 104 W3

SCALE: 3/8" = 1'-0"

PREPARED BY

PROJECT

Sample Office Building, Restroom
104
Client: Sample General Contractor

NOTICE

CHECKS AND LAYOUT ONLY.
Not an engineered design. The accessibility checks flag the dimensions of the codes turned on; they are not a certification or a plan review. Verify in the field; install per the makers' instructions.

REVISIONS

REV	DATE	DESCRIPTION
0	11/3/2026	Issued for review

DATE
11/3/2026


SCALE
3/8" = 1'-0"

DRAWN BY

SHEET SIZE
ANSI B (11" x 17")

SHEET TITLE
MOUNTING ELEVATIONS

A10-5

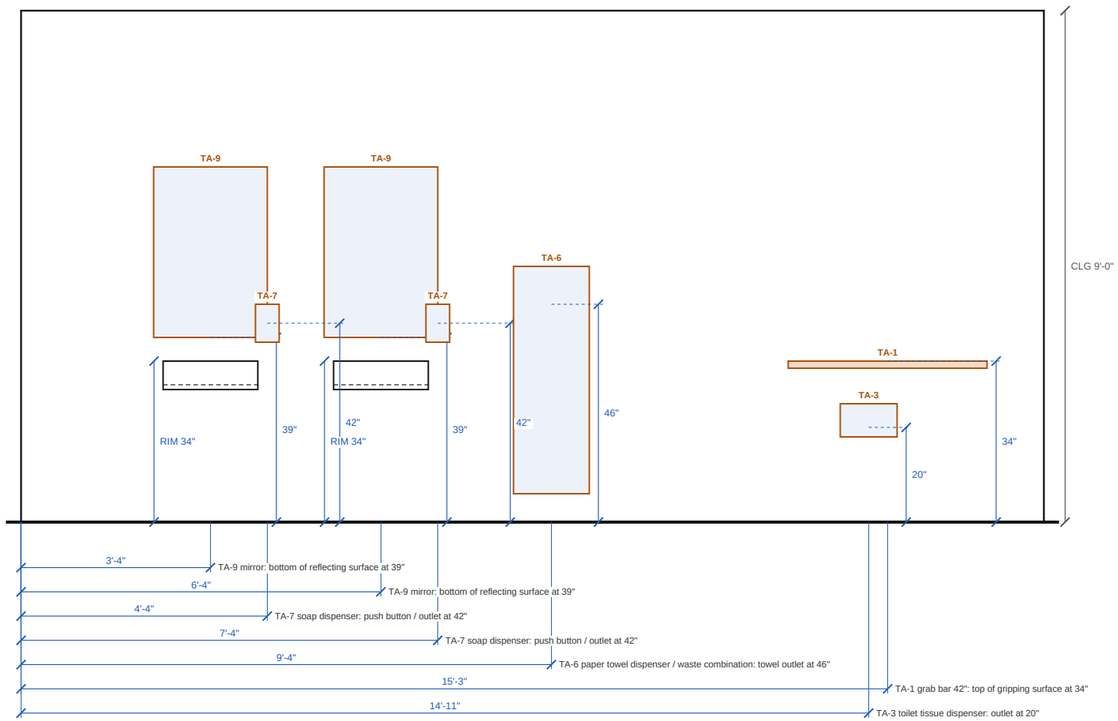

1 MOUNTING ELEVATION: RESTROOM 104 W4

SCALE: 3/8" = 1'-0"

PREPARED BY

PROJECT

Sample Office Building, Restroom
104
Client: Sample General Contractor

NOTICE

CHECKS AND LAYOUT ONLY.
Not an engineered design. The accessibility checks flag the dimensions of the codes turned on; they are not a certification or a plan review. Verify in the field; install per the makers' instructions.

REVISIONS

REV	DATE	DESCRIPTION
0	11/3/2026	Issued for review

DATE
11/3/2026


SCALE
3/8" = 1'-0"

DRAWN BY

SHEET SIZE
ANSI B (11" x 17")

SHEET TITLE
MOUNTING ELEVATIONS

A10-6

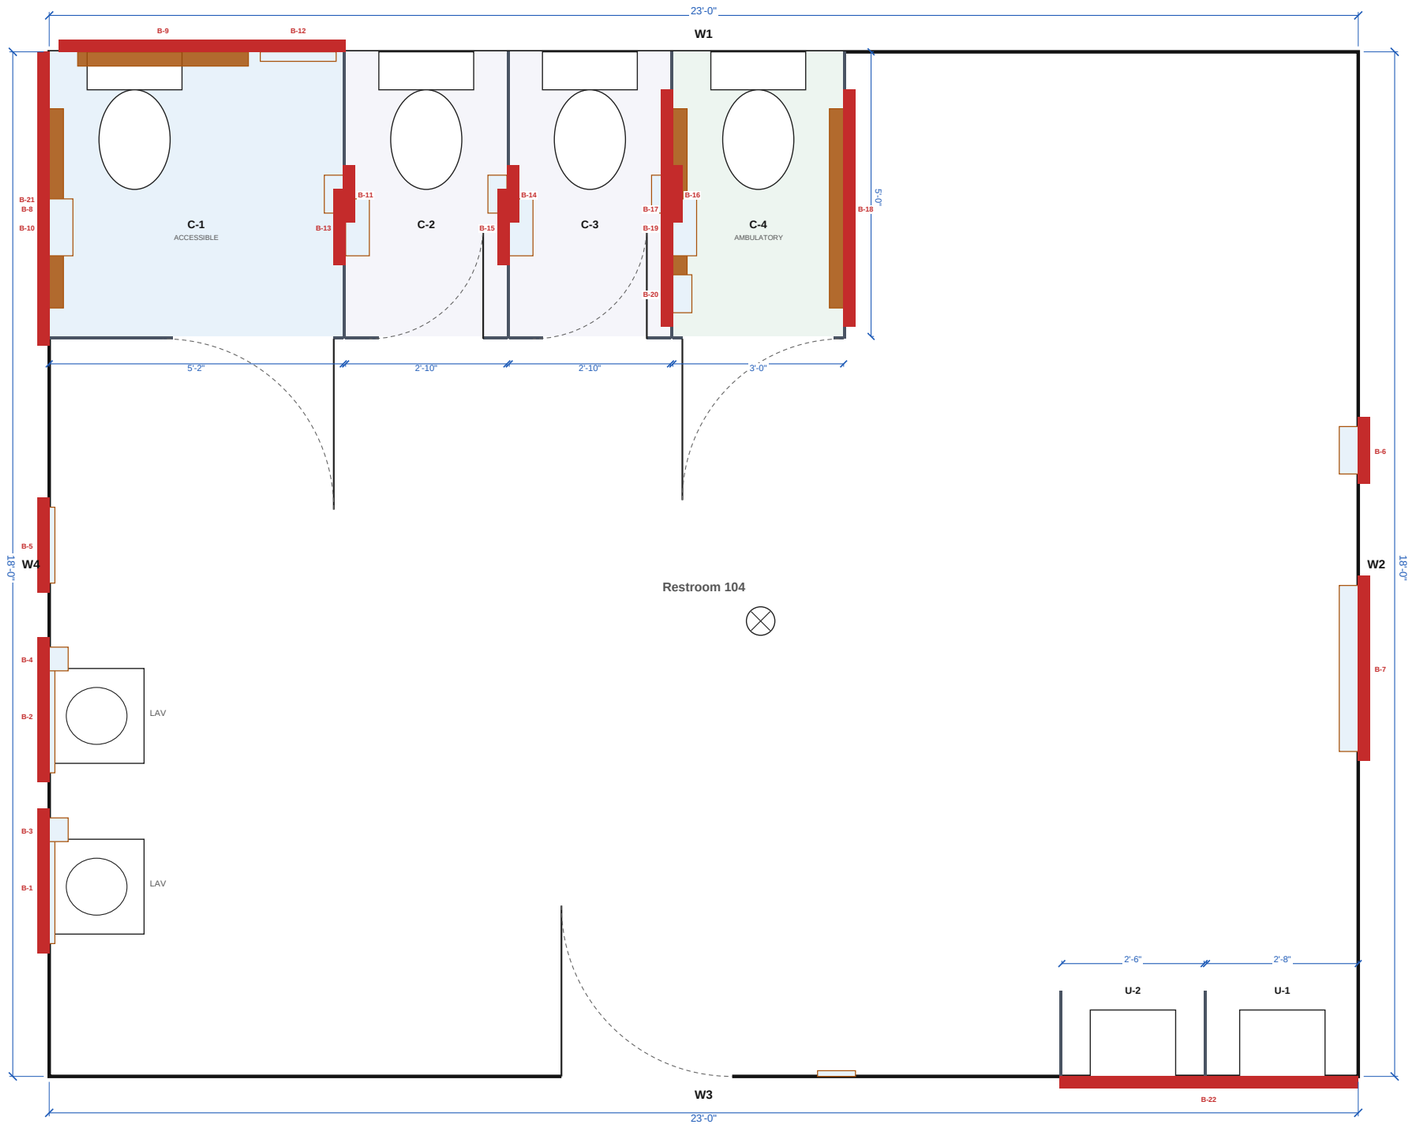

1 **BLOCKING PLAN**

SCALE: 3/8" = 1'-0"

Blocking / backing in the wall (B-n: the blocking list and elevations give heights and lengths)

Support above the ceiling (ceiling-hung partitions, by others)

Accessory (TA-n, accessory schedule)

PREPARED BY

PROJECT

Sample Office Building, Restroom
104
Client: Sample General Contractor

NOTICE

CHECKS AND LAYOUT ONLY.
Not an engineered design. The accessibility checks flag the dimensions of the codes turned on; they are not a certification or a plan review. Verify in the field; install per the makers' instructions.

REVISIONS

REV	DATE	DESCRIPTION
0	11/3/2026	Issued for review

DATE
11/3/2026


SCALE
3/8" = 1'-0"

DRAWN BY

SHEET SIZE
ANSI B (11" x 17")


SHEET TITLE
BLOCKING PLAN

A10-7

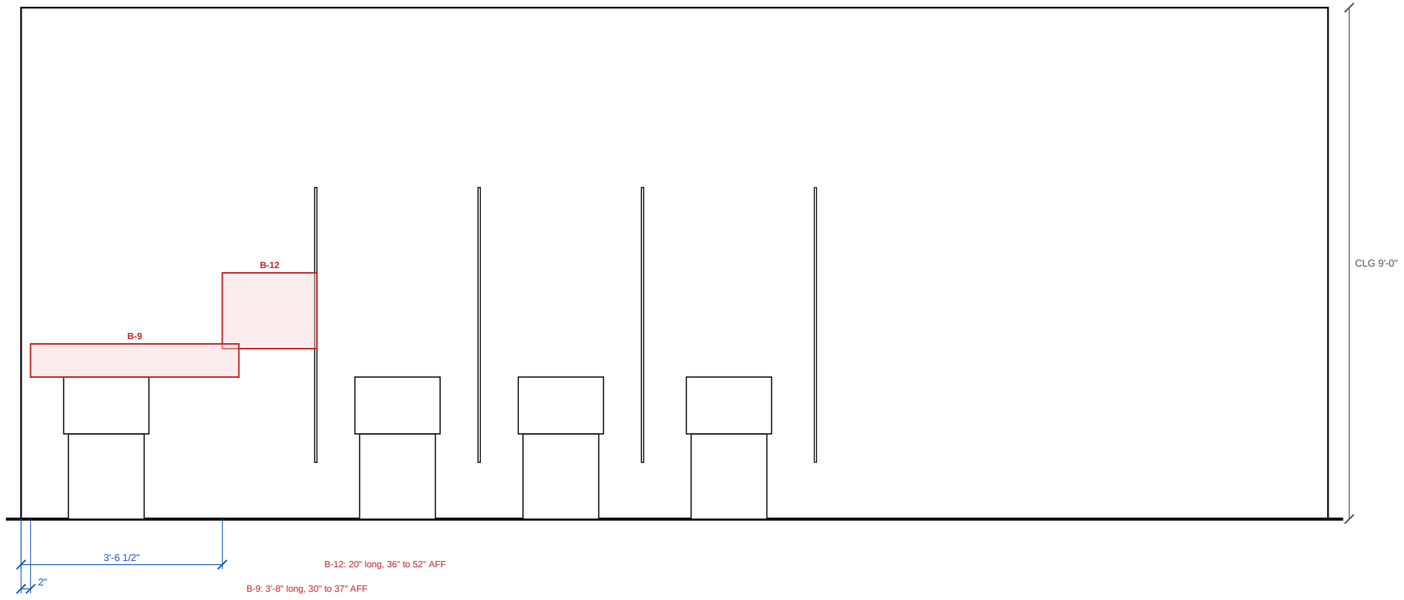

1 **BLOCKING ELEVATION: RESTROOM 104 W1**

SCALE: 3/8" = 1'-0"

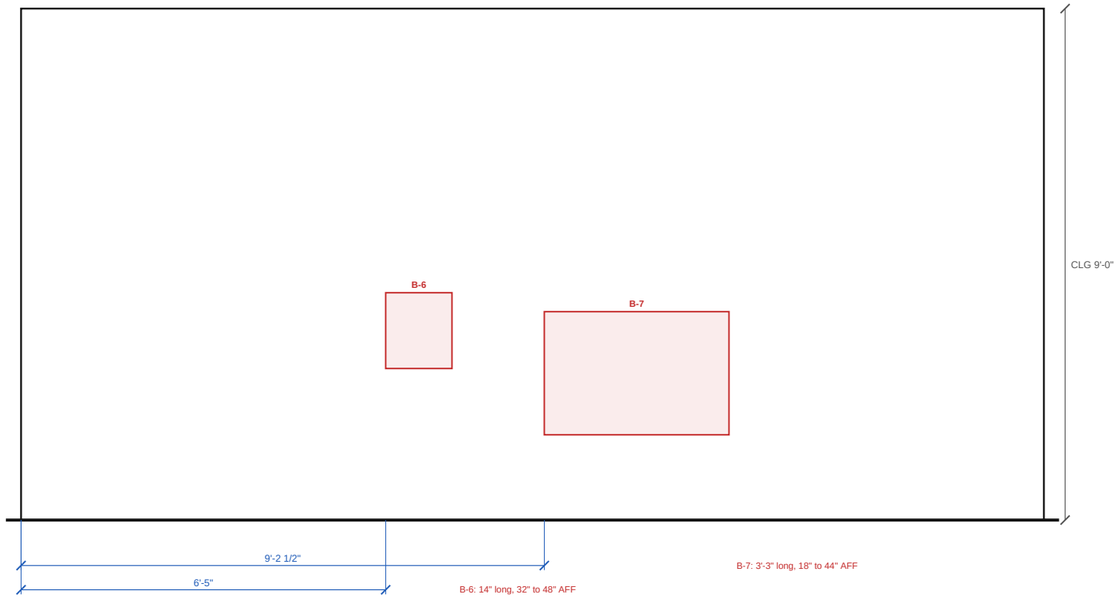

2 **BLOCKING ELEVATION: RESTROOM 104 W2**

SCALE: 3/8" = 1'-0"

PREPARED BY

PROJECT

Sample Office Building, Restroom
104
Client: Sample General Contractor

NOTICE

CHECKS AND LAYOUT ONLY.
Not an engineered design. The accessibility checks flag the dimensions of the codes turned on; they are not a certification or a plan review. Verify in the field; install per the makers' instructions.

REVISIONS

REV	DATE	DESCRIPTION
0	11/3/2026	Issued for review

DATE
11/3/2026


SCALE
3/8" = 1'-0"

DRAWN BY

SHEET SIZE
ANSI B (11" x 17")

SHEET TITLE
BLOCKING ELEVATIONS

A10-8

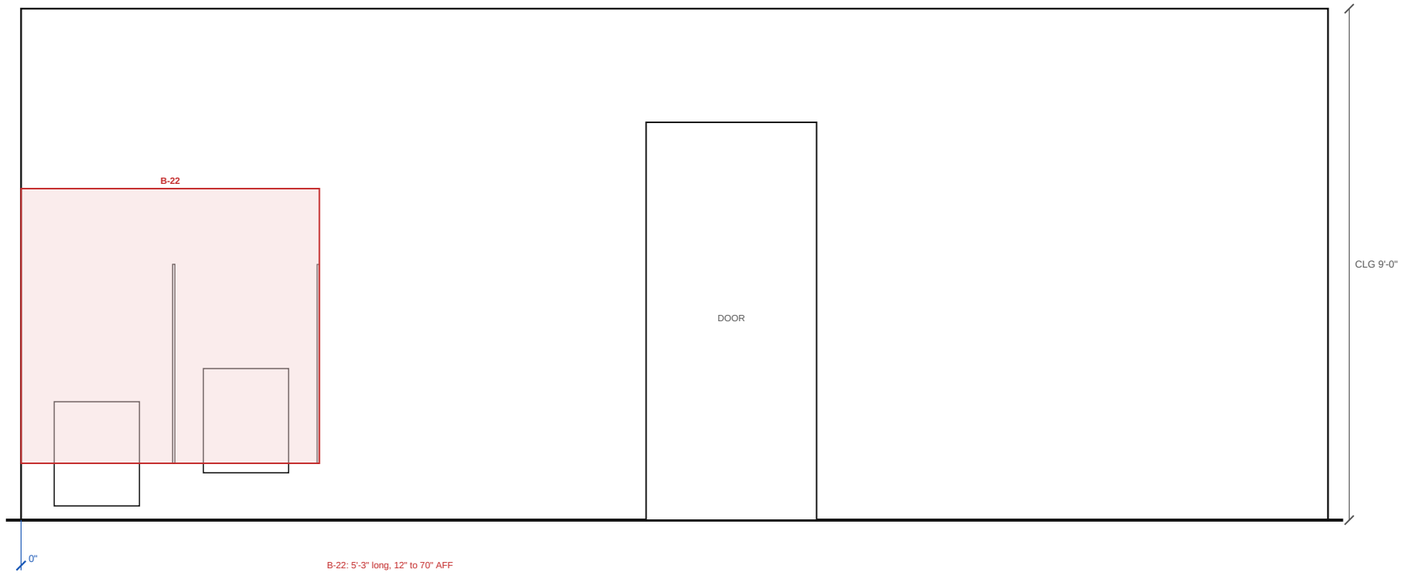

1 BLOCKING ELEVATION: RESTROOM 104 W3

SCALE: 3/8" = 1'-0"

PREPARED BY

PROJECT

Sample Office Building, Restroom
104
Client: Sample General Contractor

NOTICE

CHECKS AND LAYOUT ONLY.
Not an engineered design. The accessibility checks flag the dimensions of the codes turned on; they are not a certification or a plan review. Verify in the field; install per the makers' instructions.

REVISIONS

REV	DATE	DESCRIPTION
0	11/3/2026	Issued for review

DATE
11/3/2026


SCALE
3/8" = 1'-0"

DRAWN BY

SHEET SIZE
ANSI B (11" x 17")

SHEET TITLE
BLOCKING ELEVATIONS

A10-9

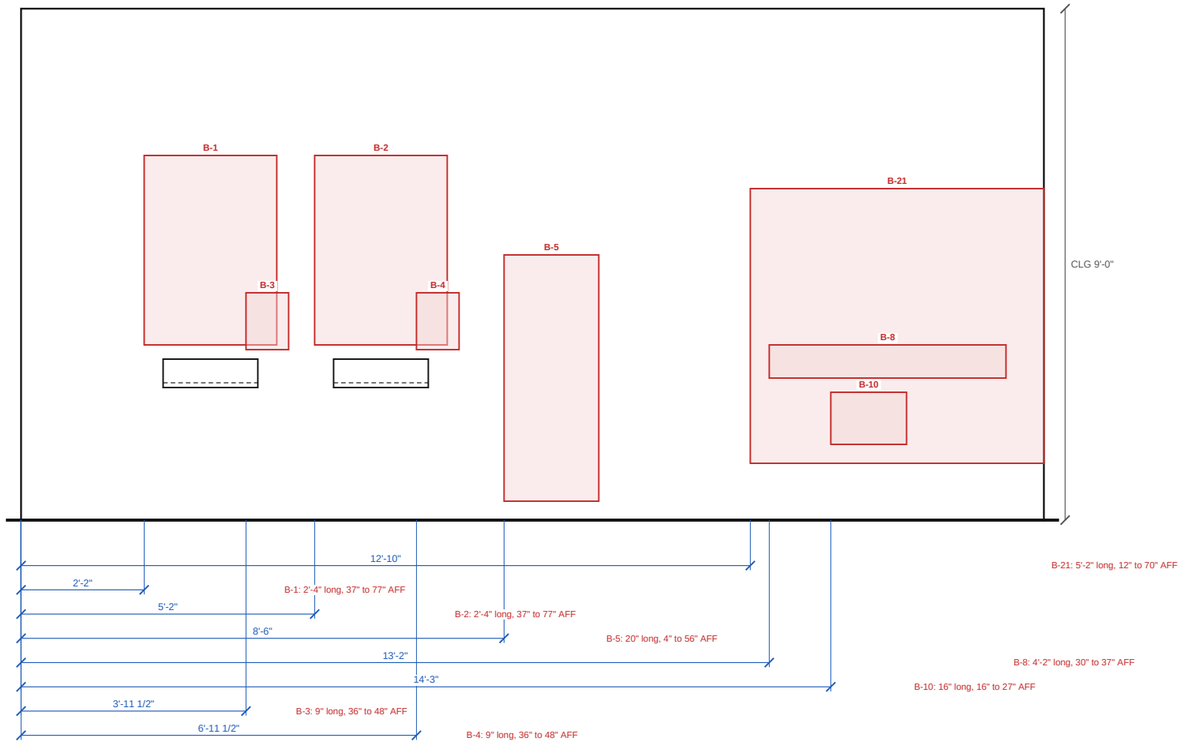

1

BLOCKING ELEVATION: RESTROOM 104 W4

SCALE: 3/8" = 1'-0"

PREPARED BY

PROJECT

Sample Office Building, Restroom
104
Client: Sample General Contractor

NOTICE

CHECKS AND LAYOUT ONLY.
Not an engineered design. The accessibility checks flag the dimensions of the codes turned on; they are not a certification or a plan review. Verify in the field; install per the makers' instructions.

REVISIONS

REV	DATE	DESCRIPTION
0	11/3/2026	Issued for review

DATE
11/3/2026

SCALE
3/8" = 1'-0"

DRAWN BY

SHEET SIZE
ANSI B (11" x 17")

SHEET TITLE
BLOCKING ELEVATIONS

A10-10

BLOCKING LIST FOR THE GC (BY OTHERS)

TAG	FOR	WHERE	ALONG THE WALL	HEIGHT AFF	LENGTH	BACKING
B-1	TA-9 Mirror	Restroom 104 W4	2'-2" to 4'-6" from the wall start	37" to 77"	2'-4"	Backing for the anchors
B-2	TA-9 Mirror	Restroom 104 W4	5'-2" to 7'-6" from the wall start	37" to 77"	2'-4"	Backing for the anchors
B-3	TA-7 Soap dispenser	Restroom 104 W4	3'-11 1/2" to 4'-8 1/2" from the wall start	36" to 48"	9"	Backing for the anchors
B-4	TA-7 Soap dispenser	Restroom 104 W4	6'-11 1/2" to 7'-8 1/2" from the wall start	36" to 48"	9"	Backing for the anchors
B-5	TA-6 Paper towel dispenser / waste combination	Restroom 104 W4	8'-6" to 10'-2" from the wall start	4" to 56"	20"	Framed rough opening + backing at the flanges
B-6	TA-8 Hand dryer	Restroom 104 W2	6'-5" to 7'-7" from the wall start	32" to 48"	14"	Backing for the anchors
B-7	TA-10 Baby changing station	Restroom 104 W2	9'-2 1/2" to 12'-5 1/2" from the wall start	18" to 44"	3'-3"	Backing for the anchors
B-8	TA-1 Grab bar	Restroom 104 W4 (C-1)	13'-2" to 17'-4" from the wall start	30" to 37"	4'-2"	Continuous backing, 2x wood blocking or 16 ga steel plate, for a 250 lb load (609.8)
B-9	TA-2 Grab bar	Restroom 104 W1 (C-1)	2" to 3'-10" from the wall start	30" to 37"	3'-8"	Continuous backing, 2x wood blocking or 16 ga steel plate, for a 250 lb load (609.8)
B-10	TA-3 Toilet tissue dispenser	Restroom 104 W4 (C-1)	14'-3" to 15'-7" from the wall start	16" to 27"	16"	Backing for the anchors
B-11	TA-5 Sanitary napkin disposal	C-1 right panel	2'-0" to 3'-0" from the rear wall	23" to 37"	12"	Partition reinforcement (by the partition maker): through-bolted
B-12	TA-4 Seat cover dispenser	Restroom 104 W1 (C-1)	3'-6 1/2" to 5'-2 1/2" from the wall start	36" to 52"	20"	Backing for the anchors
B-13	TA-3 Toilet tissue dispenser	C-2 left panel	2'-5" to 3'-9" from the rear wall	16" to 27"	16"	Partition reinforcement (by the partition maker): through-bolted
B-14	TA-5 Sanitary napkin disposal	C-2 right panel	2'-0" to 3'-0" from the rear wall	23" to 37"	12"	Partition reinforcement (by the partition maker): through-bolted
B-15	TA-3 Toilet tissue dispenser	C-3 left panel	2'-5" to 3'-9" from the rear wall	16" to 27"	16"	Partition reinforcement (by the partition maker): through-bolted
B-16	TA-5 Sanitary napkin disposal	C-3 right panel	2'-0" to 3'-0" from the rear wall	23" to 37"	12"	Partition reinforcement (by the partition maker): through-bolted
B-17	TA-1 Grab bar	C-4 left panel	8" to 4'-10" from the rear wall	30" to 37"	4'-2"	Partition reinforcement (by the partition maker): through-bolted
B-18	TA-1 Grab bar	C-4 right panel	8" to 4'-10" from the rear wall	30" to 37"	4'-2"	Partition reinforcement (by the partition maker): through-bolted
B-19	TA-3 Toilet tissue dispenser	C-4 left panel	2'-5" to 3'-9" from the rear wall	16" to 27"	16"	Partition reinforcement (by the partition maker): through-bolted
B-20	TA-5 Sanitary napkin disposal	C-4 left panel	3'-9" to 4'-9" from the rear wall	17" to 31"	12"	Partition reinforcement (by the partition maker): through-bolted
B-21	Partition wall brackets (C-1 left end)	Restroom 104 W4	12'-10" to 18'-0" from the wall start	12" to 70"	5'-2"	Backing for the panel wall brackets and the headrail end bracket
B-22	Wall-hung partitions	Restroom 104 W3	0" to 5'-3" from the wall start	12" to 70"	5'-3"	Continuous backing for the panel brackets along the wall

PREPARED BY

PROJECT

Sample Office Building, Restroom
104
Client: Sample General Contractor

NOTICE

CHECKS AND LAYOUT ONLY.
Not an engineered design. The accessibility checks flag the dimensions of the codes turned on; they are not a certification or a plan review. Verify in the field; install per the makers' instructions.

REVISIONS

REV	DATE	DESCRIPTION
0	11/3/2026	Issued for review

DATE
11/3/2026


SCALE
NTS

DRAWN BY

SHEET SIZE
ANSI B (11" x 17")


SHEET TITLE
BLOCKING LIST

A10-11

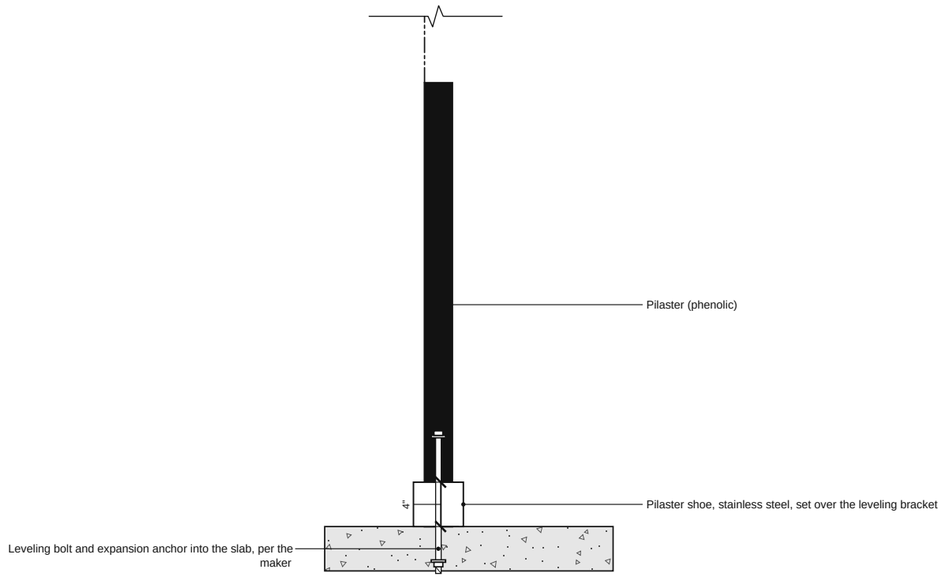


1 **PILASTER AT THE FLOOR** NTS

REF: Partition maker's installation instructions

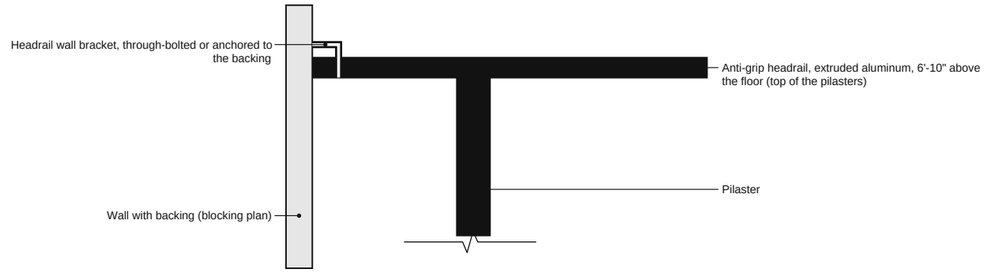


2 **HEADRAIL AT THE PILASTER AND WALL** NTS

REF: Partition maker's installation instructions

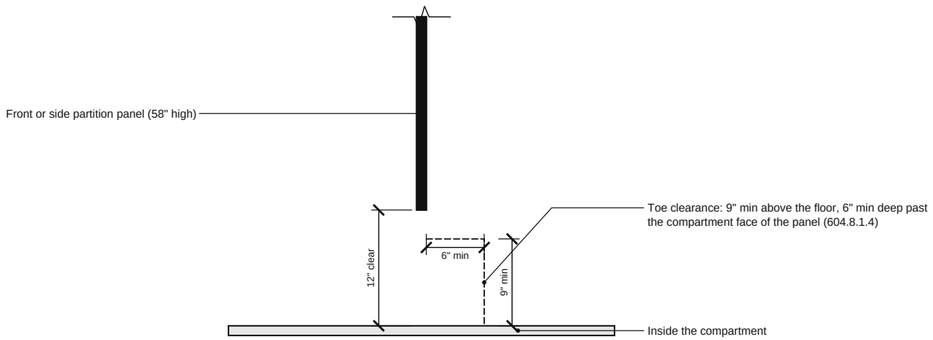

3 **TOE CLEARANCE AT THE ACCESSIBLE COMPARTMENT** NTS

REF: ADA 2010 604.8.1.4

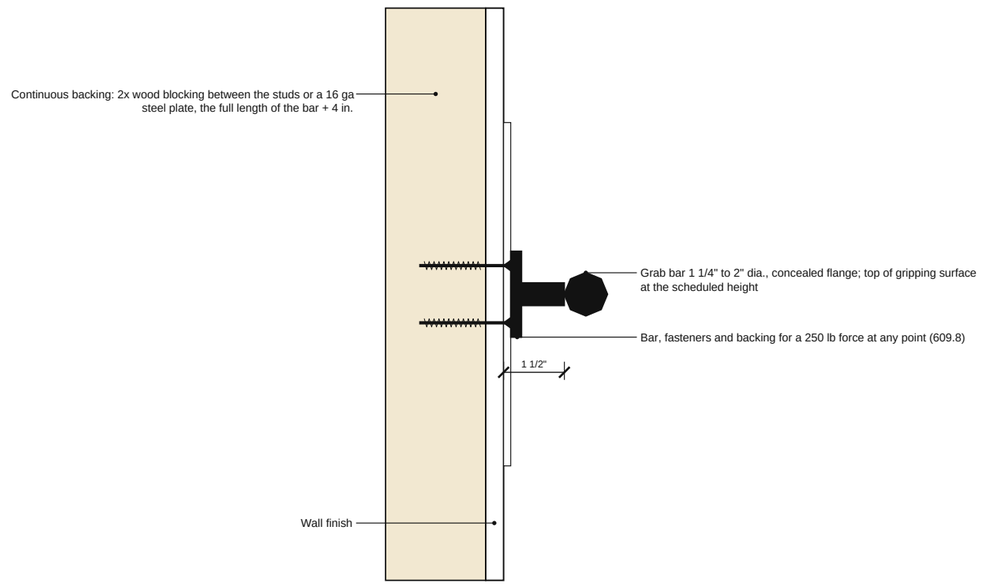

4 **GRAB BAR BACKING** NTS

REF: ADA 2010 609.3, 609.8

Typical detail, not to scale. Not an engineered design: verify with your building department and the manufacturer's installation instructions.

PREPARED BY

PROJECT

Sample Office Building, Restroom
104
Client: Sample General Contractor

NOTICE

CHECKS AND LAYOUT ONLY.
Not an engineered design. The accessibility checks flag the dimensions of the codes turned on; they are not a certification or a plan review. Verify in the field; install per the makers' instructions.

REVISIONS

REV	DATE	DESCRIPTION
0	11/3/2026	Issued for review

DATE
11/3/2026

SCALE
NTS

DRAWN BY

SHEET SIZE
ANSI B (11" x 17")

SHEET TITLE
DETAILS

A10-12

SHEET 12 OF 16

COMPARTMENT SCHEDULE

TAG	TYPE	SIZE	FIXTURE	DOOR	MOUNTING; MATERIAL	HEIGHTS	HARDWARE
C-1	Wheelchair accessible	62" W x 60" D	floor-mounted, CL 18" from the left	36" leaf, 34" clear, swings out, hinge right	Floor-mounted, overhead-braced; Phenolic	Panels 58", 12" off the floor, pilasters 6'-10"	Gravity hinges with a self-closing cam; Slide latch (no tight grasping); pulls both sides; coat hook/bumper
C-2	Standard	34" W x 60" D	floor-mounted, CL 17" from the left	24" leaf, 22" clear, swings in, hinge right	Floor-mounted, overhead-braced; Phenolic	Panels 58", 12" off the floor, pilasters 6'-10"	Gravity hinges with a self-closing cam; Slide latch (no tight grasping); pulls both sides; coat hook/bumper
C-3	Standard	34" W x 60" D	floor-mounted, CL 17" from the left	24" leaf, 22" clear, swings in, hinge right	Floor-mounted, overhead-braced; Phenolic	Panels 58", 12" off the floor, pilasters 6'-10"	Gravity hinges with a self-closing cam; Slide latch (no tight grasping); pulls both sides; coat hook/bumper
C-4	Ambulatory	36" W x 60" D	floor-mounted, CL 18" from the left	34" leaf, 32" clear, swings out, hinge left	Floor-mounted, overhead-braced; Phenolic	Panels 58", 12" off the floor, pilasters 6'-10"	Gravity hinges with a self-closing cam; Slide latch (no tight grasping); pulls both sides; coat hook/bumper
U-1	Urinal screen bay	32" between screens	Urinal, rim 17" (accessible)	-	Wall-hung; Phenolic	Screen 42" high x 18" deep	-
U-2	Urinal screen bay	30" between screens	Urinal, rim 24"	-	Wall-hung; Phenolic	Screen 42" high x 18" deep	-

PREPARED BY

PROJECT

Sample Office Building, Restroom
104
Client: Sample General Contractor

NOTICE

CHECKS AND LAYOUT ONLY.
Not an engineered design. The accessibility checks flag the dimensions of the codes turned on; they are not a certification or a plan review. Verify in the field; install per the makers' instructions.

REVISIONS

REV	DATE	DESCRIPTION
0	11/3/2026	Issued for review

DATE
11/3/2026

SCALE
NTS

DRAWN BY

SHEET SIZE
ANSI B (11" x 17")

SHEET TITLE
COMPARTMENT SCHEDULE

A10-13

ACCESSORY SCHEDULE AND BUY LIST

TAG	ACCESSORY	MOUNT	QTY	HEIGHT AFF	WHERE
TA-9	Mirror	surface	2	39" to bottom of reflecting surface	Restroom 104 W4
TA-7	Soap dispenser	surface	2	42" to push button / outlet	Restroom 104 W4
TA-6	Paper towel dispenser / waste combination	recessed	1	46" to towel outlet	Restroom 104 W4
TA-8	Hand dryer	surface	1	40" to air outlet / sensor	Restroom 104 W2
TA-10	Baby changing station	surface	1	40" to bed handle (folded)	Restroom 104 W2
TA-12	Tactile room sign	surface	1	54" to baseline of the tactile characters	Restroom 104 W3
TA-1	Grab bar, 42"	surface	3	34" to top of gripping surface	Restroom 104 W4 (C-1); C-4 left panel; C-4 right panel
TA-2	Grab bar, 36"	surface	1	34" to top of gripping surface	Restroom 104 W1 (C-1)
TA-3	Toilet tissue dispenser	surface	4	20" to outlet	Restroom 104 W4 (C-1); C-2 left panel; C-3 left panel; C-4 left panel
TA-11	Coat hook	surface	4	44" to hook	C-1 door; C-2 door; C-3 door; C-4 door
TA-5	Sanitary napkin disposal	surface	4	30", 24" to lid	C-1 right panel; C-2 right panel; C-3 right panel; C-4 left panel
TA-4	Seat cover dispenser	surface	1	44" to dispensing slot	Restroom 104 W1 (C-1)

BUY LIST (GENERIC PRODUCTS AT THE CONTRACTOR'S PRICES; INSTALL HOURS)

GROUP	ITEM	QTY	EACH	MATERIAL	HOURS
Compartments	Toilet compartment, wheelchair accessible: phenolic, floor-mounted, overhead-braced	1 each	$1,688	$1,688	3
Compartments	Toilet compartment, standard: phenolic, floor-mounted, overhead-braced	2 each	$1,250	$2,500	5
Compartments	Toilet compartment, ambulatory: phenolic, floor-mounted, overhead-braced	1 each	$1,375	$1,375	3
Urinal screens	Urinal screen: phenolic, wall-hung	2 each	$480	$960	2
Accessories	TA-9 Mirror	2 each	$120	$240	1
Accessories	TA-7 Soap dispenser	2 each	$40	$80	0.6
Accessories	TA-6 Paper towel dispenser / waste combination, recessed	1 each	$650	$650	2.5
Accessories	TA-8 Hand dryer, surface	1 each	$650	$650	1.5
Accessories	TA-10 Baby changing station, surface	1 each	$350	$350	1.5
Accessories	TA-12 Tactile room sign	1 each	$45	$45	0.3
Accessories	TA-1 Grab bar 42"	3 each	$55	$165	2.3
Accessories	TA-2 Grab bar 36"	1 each	$50	$50	0.8
Accessories	TA-3 Toilet tissue dispenser, surface	4 each	$45	$180	1.6
Accessories	TA-11 Coat hook	4 each	$15	$60	0.8
Accessories	TA-5 Sanitary napkin disposal, surface	4 each	$35	$140	1.2
Accessories	TA-4 Seat cover dispenser, surface	1 each	$40	$40	0.4
Layout	Layout and coordination (field verify, mark out)	1 job	$0	$0	2
Freight	Freight to the site	1 job	$250	$250	0
TOTAL				$9,423	29.4

PREPARED BY

PROJECT

Sample Office Building, Restroom 104

Client: Sample General Contractor

NOTICE

CHECKS AND LAYOUT ONLY.
Not an engineered design. The accessibility checks flag the dimensions of the codes turned on; they are not a certification or a plan review. Verify in the field; install per the makers' instructions.

REVISIONS

REV	DATE	DESCRIPTION
0	11/3/2026	Issued for review

DATE
11/3/2026

SCALE
NTS

DRAWN BY

SHEET SIZE
ANSI B (11" x 17")

SHEET TITLE
ACCESSORY SCHEDULE

A10-14

SHEET 14 OF 16

ACCESSIBILITY CHECKS AND NOTES

RESULT	WHAT	CHECK	CODE / SECTION
CODES CHECKED: ADA 2010. CHECKS, NOT A CERTIFICATION.			
NOTE	C-4 (ambulatory)	Grab bar on a partition panel: through-bolt it with the partition maker's reinforcement and backing plates (250 lb, 609.8). Confirm the panel material carries it.	ADA 2010 609.8
NOTE	Lavatories	2 of 2 lavatories meet 606 as drawn (at least one must).	ADA 2010 213.3.4
OK	Restroom	A wheelchair accessible compartment	ADA 2010 213.3.1
OK	Restroom	An ambulatory compartment (4 compartments, 6 water closets and urinals)	ADA 2010 213.3.1
OK	Urinals	At least one urinal that complies (rim, depth, clear floor space)	ADA 2010 213.3.3
OK	C-1 (wheelchair accessible)	Compartment width 62"	ADA 2010 604.8.1.1
OK	C-1 (wheelchair accessible)	Compartment depth (floor-mounted water closet) 60"	ADA 2010 604.8.1.1
OK	C-1 (wheelchair accessible)	Water closet centerline from the side wall or partition 18"	ADA 2010 604.2
OK	C-1 (wheelchair accessible)	Seat height 18"	ADA 2010 604.4
OK	C-1 (wheelchair accessible)	Flush control on the open side	ADA 2010 604.6
OK	C-1 (wheelchair accessible)	Door clear opening 34"	ADA 2010 404.2.3
OK	C-1 (wheelchair accessible)	Door opening from the side farthest from the water closet 2"	ADA 2010 604.8.1.2
OK	C-1 (wheelchair accessible)	Self-closing door (gravity hinges with a self-closing cam)	ADA 2010 604.8.1.2, 604.8.2.2
OK	C-1 (wheelchair accessible)	Door pull on both sides near the latch	ADA 2010 604.8.1.2, 604.8.2.2
OK	C-1 (wheelchair accessible)	Latch and pull height 38"	ADA 2010 404.2.7
OK	C-1 (wheelchair accessible)	Out-swinging door	ADA 2010 604.8.1.2, 604.8.2.2
OK	C-1 (wheelchair accessible)	Clear floor outside the door, pull side (18" beyond the latch included) 69"	ADA 2010 404.2.4.1
OK	C-1 (wheelchair accessible)	Toe clearance under the front partition 12"	ADA 2010 604.8.1.4
OK	C-1 (wheelchair accessible)	Toe clearance under a side partition 12"	ADA 2010 604.8.1.4
OK	C-1 (wheelchair accessible)	Toe clearance depth beyond the partition face (open below the panels) 6"	ADA 2010 604.8.1.4
OK	C-1 (wheelchair accessible)	Side and rear grab bars	ADA 2010 604.8.1.5
OK	C-1 (wheelchair accessible)	Side grab bar length 42"	ADA 2010 604.5.1
OK	C-1 (wheelchair accessible)	Side grab bar from the rear wall 12"	ADA 2010 604.5.1
OK	C-1 (wheelchair accessible)	Side grab bar reaches from the rear wall 54"	ADA 2010 604.5.1
OK	C-1 (wheelchair accessible)	Side grab bar height 34"	ADA 2010 609.4
OK	C-1 (wheelchair accessible)	Rear grab bar length 36"	ADA 2010 604.5.2
OK	C-1 (wheelchair accessible)	Rear bar past the centerline on the wall side 12"	ADA 2010 604.5.2
OK	C-1 (wheelchair accessible)	Rear bar past the centerline on the open side 24"	ADA 2010 604.5.2
OK	C-1 (wheelchair accessible)	Rear grab bar height 34"	ADA 2010 609.4
OK	C-1 (wheelchair accessible)	Toilet paper in front of the water closet (to the dispenser centerline) 8"	ADA 2010 604.7
OK	C-1 (wheelchair accessible)	Toilet paper outlet height 20"	ADA 2010 604.7
OK	C-1 (wheelchair accessible)	Toilet paper not behind the grab bar	ADA 2010 604.7
OK	C-1 (wheelchair accessible)	Grab bar to the dispenser below it 7 1/2"	ADA 2010 609.3
OK	C-4 (ambulatory)	Compartment depth 60"	ADA 2010 604.8.2.1
OK	C-4 (ambulatory)	Compartment width 36"	ADA 2010 604.8.2.1
OK	C-4 (ambulatory)	Water closet centerline from the side wall or partition 18"	ADA 2010 604.2
OK	C-4 (ambulatory)	Seat height 18"	ADA 2010 604.4
OK	C-4 (ambulatory)	Door clear opening 32"	ADA 2010 404.2.3
OK	C-4 (ambulatory)	Self-closing door (gravity hinges with a self-closing cam)	ADA 2010 604.8.1.2, 604.8.2.2
OK	C-4 (ambulatory)	Door pull on both sides near the latch	ADA 2010 604.8.1.2, 604.8.2.2
OK	C-4 (ambulatory)	Latch and pull height 38"	ADA 2010 404.2.7
OK	C-4 (ambulatory)	Out-swinging door	ADA 2010 604.8.1.2, 604.8.2.2
OK	C-4 (ambulatory)	Clear floor outside the door, pull side (18" beyond the latch included) 120"	ADA 2010 404.2.4.1
OK	C-4 (ambulatory)	Side grab bars on both sides	ADA 2010 604.8.2.3
OK	C-4 (ambulatory)	Side grab bar length 42"	ADA 2010 604.5.1
OK	C-4 (ambulatory)	Side grab bar from the rear wall 12"	ADA 2010 604.5.1
OK	C-4 (ambulatory)	Side grab bar reaches from the rear wall 54"	ADA 2010 604.5.1
OK	C-4 (ambulatory)	Side grab bar height 34"	ADA 2010 609.4
OK	C-4 (ambulatory)	Side grab bar length 42"	ADA 2010 604.5.1
OK	C-4 (ambulatory)	Side grab bar from the rear wall 12"	ADA 2010 604.5.1
OK	C-4 (ambulatory)	Side grab bar reaches from the rear wall 54"	ADA 2010 604.5.1
OK	C-4 (ambulatory)	Side grab bar height 34"	ADA 2010 609.4
OK	C-4 (ambulatory)	Toilet paper in front of the water closet (to the dispenser centerline) 8"	ADA 2010 604.7
OK	C-4 (ambulatory)	Toilet paper outlet height 20"	ADA 2010 604.7
OK	C-4 (ambulatory)	Toilet paper not behind the grab bar	ADA 2010 604.7
OK	C-4 (ambulatory)	Grab bar to the dispenser below it 7 1/2"	ADA 2010 609.3
OK	U-1 (urinal)	Urinal rim height 17"	ADA 2010 605.2
OK	U-1 (urinal)	Urinal depth from the outer face of the rim 14"	ADA 2010 605.2
OK	U-1 (urinal)	Clear width between the screens (clear floor space) 32"	ADA 2010 305.3
OK	U-1 (urinal)	48 in. clear in front of the urinal 48"	ADA 2010 305.3
OK	Restroom 104 W4 lavatory at 3'-4"	Rim height 34"	ADA 2010 606.3
OK	Restroom 104 W4 lavatory at 3'-4"	Knee clearance height at the front 29"	ADA 2010 306.3.1
OK	Restroom 104 W4 lavatory at 3'-4"	Knee clearance width 30"	ADA 2010 306.3.5
OK	Restroom 104 W4 lavatory at 3'-4"	Knee clearance depth (the lavatory projects) 20"	ADA 2010 306.3.3
OK	Restroom 104 W4 lavatory at 3'-4"	Toe clearance under the lavatory 20"	ADA 2010 306.2.3
OK	Restroom 104 W4 lavatory at 3'-4"	30 x 48 in. forward clear floor space (under and in front)	ADA 2010 606.2
OK	Restroom 104 W4 lavatory at 6'-4"	Rim height 34"	ADA 2010 606.3
OK	Restroom 104 W4 lavatory at 6'-4"	Knee clearance height at the front 29"	ADA 2010 306.3.1

PREPARED BY

PROJECT

Sample Office Building, Restroom
104
Client: Sample General Contractor

NOTICE

CHECKS AND LAYOUT ONLY.
Not an engineered design. The accessibility checks flag the dimensions of the codes turned on; they are not a certification or a plan review. Verify in the field; install per the makers' instructions.

REVISIONS

REV	DATE	DESCRIPTION
0	11/3/2026	Issued for review

DATE
11/3/2026

SCALE
NTS

DRAWN BY

SHEET SIZE
ANSI B (11" x 17")

SHEET TITLE
CHECKS AND NOTES

A10-15

ACCESSIBILITY CHECKS AND NOTES

RESULT	WHAT	CHECK	CODE / SECTION
OK	Restroom 104 W4 lavatory at 6'-4"	Knee clearance width 30"	ADA 2010 306.3.5
OK	Restroom 104 W4 lavatory at 6'-4"	Knee clearance depth (the lavatory projects) 20"	ADA 2010 306.3.3
OK	Restroom 104 W4 lavatory at 6'-4"	Toe clearance under the lavatory 20"	ADA 2010 306.2.3
OK	Restroom 104 W4 lavatory at 6'-4"	30 x 48 in. forward clear floor space (under and in front)	ADA 2010 606.2
OK	Restroom 104	A 60 in. turning circle fits 60"	ADA 2010 603.2.1, 304.3.1
OK	Restroom 104 door (W3)	Door clear width 34"	ADA 2010 404.2.3
OK	Restroom 104 door (W3)	Door hardware height 38"	ADA 2010 404.2.7
OK	Restroom 104 door (W3)	Clear floor inside the room, pull side 120"	ADA 2010 404.2.4.1
OK	Restroom 104 door (W3)	Door swing clear of fixture clear floor spaces	ADA 2010 603.2.3
OK	TA-9 mirror (Restroom 104 W4)	Bottom of the reflecting surface 39"	ADA 2010 603.3
OK	TA-9 mirror (Restroom 104 W4)	Bottom of the reflecting surface 39"	ADA 2010 603.3
OK	TA-7 soap dispenser (Restroom 104 W4)	Operable part height (push button / outlet) 42"	ADA 2010 308.2.1, 308.3.1
OK	TA-7 soap dispenser (Restroom 104 W4)	Operable part height (push button / outlet) 42"	ADA 2010 308.2.1, 308.3.1
OK	TA-7 soap dispenser (Restroom 104 W4)	Operable part height (push button / outlet) 42"	ADA 2010 308.2.1, 308.3.1
OK	TA-7 soap dispenser (Restroom 104 W4)	Operable part height (push button / outlet) 42"	ADA 2010 308.2.1, 308.3.1
OK	TA-6 paper towel dispenser / waste combination (Restroom 104 W4)	Operable part height (towel outlet) 46"	ADA 2010 308.2.1, 308.3.1
OK	TA-6 paper towel dispenser / waste combination (Restroom 104 W4)	Operable part height (towel outlet) 46"	ADA 2010 308.2.1, 308.3.1
OK	TA-8 hand dryer (Restroom 104 W2)	Operable part height (air outlet / sensor) 40"	ADA 2010 308.2.1, 308.3.1
OK	TA-8 hand dryer (Restroom 104 W2)	Operable part height (air outlet / sensor) 40"	ADA 2010 308.2.1, 308.3.1
OK	TA-8 hand dryer (Restroom 104 W2)	Protrusion (leading edge at 34 1/2") 4"	ADA 2010 307.2
OK	TA-10 baby changing station (Restroom 104 W2)	Operable part height (bed handle (folded)) 40"	ADA 2010 308.2.1, 308.3.1
OK	TA-10 baby changing station (Restroom 104 W2)	Operable part height (bed handle (folded)) 40"	ADA 2010 308.2.1, 308.3.1
OK	TA-12 tactile room sign (Restroom 104 W3)	Baseline of the tactile characters 54"	ADA 2010 703.4.1
OK	TA-12 tactile room sign (Restroom 104 W3)	Sign on the latch side; the door swings away from it 18"	ADA 2010 703.4.2
OK	TA-1 grab bar (Restroom 104 W4 (C-1))	Grab bar diameter 1 1/2"	ADA 2010 609.2.1
OK	TA-1 grab bar (Restroom 104 W4 (C-1))	Space to the wall (standard 1 1/2 in. flanges) 1 1/2"	ADA 2010 609.3
OK	TA-2 grab bar (Restroom 104 W1 (C-1))	Grab bar diameter 1 1/2"	ADA 2010 609.2.1
OK	TA-2 grab bar (Restroom 104 W1 (C-1))	Space to the wall (standard 1 1/2 in. flanges) 1 1/2"	ADA 2010 609.3
OK	TA-11 coat hook (C-1 door)	Coat hook height (reach range) 44"	ADA 2010 308.2.1, 308.3.1
OK	TA-11 coat hook (C-1 door)	Coat hook height (reach range) 44"	ADA 2010 308.2.1, 308.3.1
OK	TA-5 sanitary napkin disposal (C-1 right panel)	Operable part height (lid) 30"	ADA 2010 308.2.1, 308.3.1
OK	TA-5 sanitary napkin disposal (C-1 right panel)	Operable part height (lid) 30"	ADA 2010 308.2.1, 308.3.1
OK	TA-4 seat cover dispenser (Restroom 104 W1 (C-1))	Operable part height (dispensing slot) 44"	ADA 2010 308.2.1, 308.3.1
OK	TA-4 seat cover dispenser (Restroom 104 W1 (C-1))	Operable part height (dispensing slot) 44"	ADA 2010 308.2.1, 308.3.1
OK	TA-11 coat hook (C-2 door)	Coat hook height (reach range) 44"	ADA 2010 308.2.1, 308.3.1
OK	TA-11 coat hook (C-2 door)	Coat hook height (reach range) 44"	ADA 2010 308.2.1, 308.3.1
OK	TA-5 sanitary napkin disposal (C-2 right panel)	Operable part height (lid) 30"	ADA 2010 308.2.1, 308.3.1
OK	TA-5 sanitary napkin disposal (C-2 right panel)	Operable part height (lid) 30"	ADA 2010 308.2.1, 308.3.1
OK	TA-11 coat hook (C-3 door)	Coat hook height (reach range) 44"	ADA 2010 308.2.1, 308.3.1
OK	TA-11 coat hook (C-3 door)	Coat hook height (reach range) 44"	ADA 2010 308.2.1, 308.3.1
OK	TA-5 sanitary napkin disposal (C-3 right panel)	Operable part height (lid) 30"	ADA 2010 308.2.1, 308.3.1
OK	TA-5 sanitary napkin disposal (C-3 right panel)	Operable part height (lid) 30"	ADA 2010 308.2.1, 308.3.1
OK	TA-1 grab bar (C-4 left panel)	Grab bar diameter 1 1/2"	ADA 2010 609.2.1
OK	TA-1 grab bar (C-4 left panel)	Space to the wall (standard 1 1/2 in. flanges) 1 1/2"	ADA 2010 609.3
OK	TA-1 grab bar (C-4 right panel)	Grab bar diameter 1 1/2"	ADA 2010 609.2.1
OK	TA-1 grab bar (C-4 right panel)	Space to the wall (standard 1 1/2 in. flanges) 1 1/2"	ADA 2010 609.3
OK	TA-11 coat hook (C-4 door)	Coat hook height (reach range) 44"	ADA 2010 308.2.1, 308.3.1
OK	TA-11 coat hook (C-4 door)	Coat hook height (reach range) 44"	ADA 2010 308.2.1, 308.3.1
OK	TA-5 sanitary napkin disposal (C-4 left panel)	Operable part height (lid) 24"	ADA 2010 308.2.1, 308.3.1
OK	TA-5 sanitary napkin disposal (C-4 left panel)	Operable part height (lid) 24"	ADA 2010 308.2.1, 308.3.1
OK	TA-5 sanitary napkin disposal (C-4 left panel)	Space below the grab bar TA-1 3 1/2"	ADA 2010 609.3

GENERAL NOTES

NO.	NOTE
1	Verify all dimensions, wall locations, plumbing rough-ins and ceiling heights in the field before ordering. Quantities on the buy list are from the layout shown.
2	Toilet compartments and urinal screens: install plumb and level per the partition maker's instructions and anchors; hardware adjusted so doors close and latch.
3	Accessories: mount at the heights scheduled (the reference point of each is listed). Fasten to the backing shown on the blocking plan; grab bars to carry the load the codes require.
4	Blocking and backing: by others unless the bid says included; installed before the wall finish. See the blocking plan for heights, lengths and locations.
5	The accessibility checks in this set flag the dimensions of the codes turned on for this job. They are not a certification: the building department and the project documents govern.

PREPARED BY

PROJECT

Sample Office Building, Restroom
104
Client: Sample General Contractor

NOTICE

CHECKS AND LAYOUT ONLY.
Not an engineered design. The accessibility checks flag the dimensions of the codes turned on; they are not a certification or a plan review. Verify in the field; install per the makers' instructions.

REVISIONS

REV	DATE	DESCRIPTION
0	11/3/2026	Issued for review

DATE
11/3/2026

SCALE
NTS

DRAWN BY

SHEET SIZE
ANSI B (11" x 17")

SHEET TITLE
CHECKS AND NOTES

A10-16