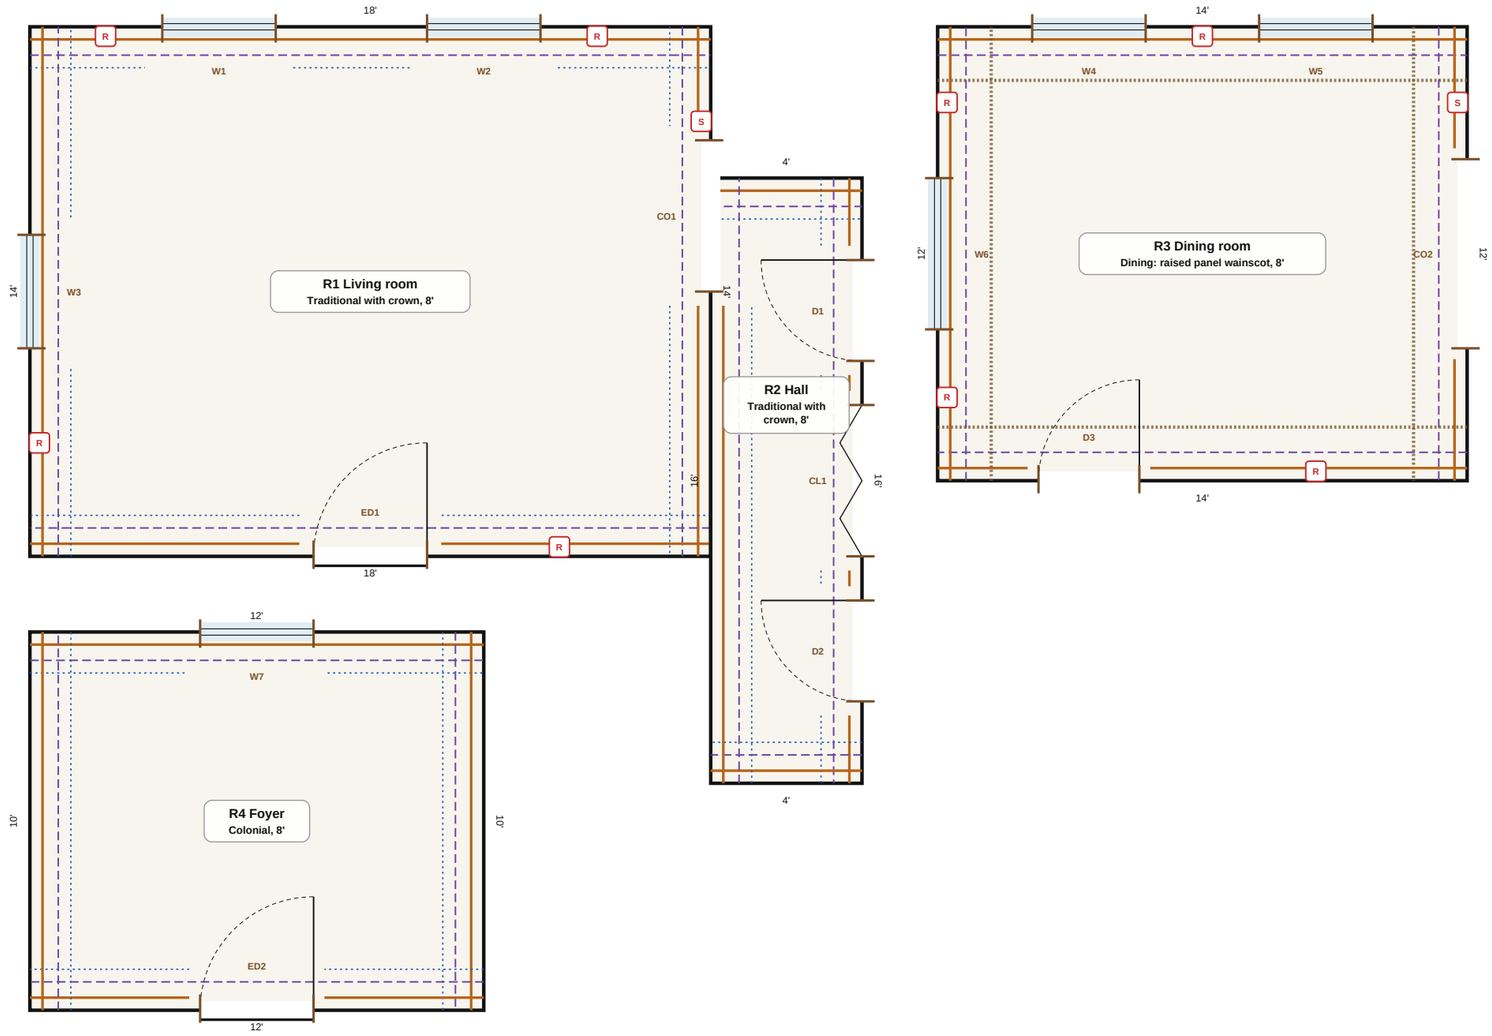


1 TRIM PLAN

SCALE: 1/4" = 1'-0"

- Base
- Crown (dashed)
- Chair rail (dotted)
- Wall treatment
- Casing; D door, ED exterior door, CL closet, CO cased opening, W window, CB cabinets; R outlet, S switch

PREPARED BY

Sample Contracting Co.
100 Main St, Anytown

PROJECT

Living, dining and foyer stair
Client: Sample client
123 Example St

NOTICE

FOR ESTIMATING AND LAYOUT ONLY.
Not an engineered design. Code figures are defaults: verify with the building department. Verify dimensions in the field; saw settings are from the geometry: verify each with a test cut.

REVISIONS

REV	DATE	DESCRIPTION
0	10/18/2026	Issued for review

DATE
10/18/2026


SCALE
1/4" = 1'-0"

DRAWN BY
SC

SHEET SIZE
ANSI B (11" x 17")


SHEET TITLE
TRIM PLAN

FC-1

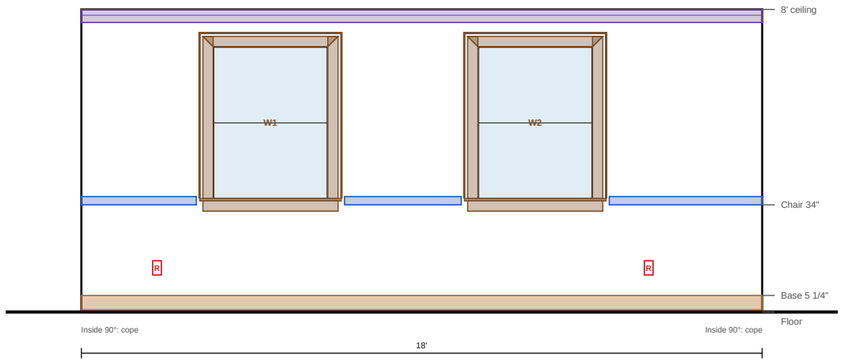


1 **R1, 1 LIVING ROOM, WALL 1 (18')**

SCALE: 1/4" = 1'-0"

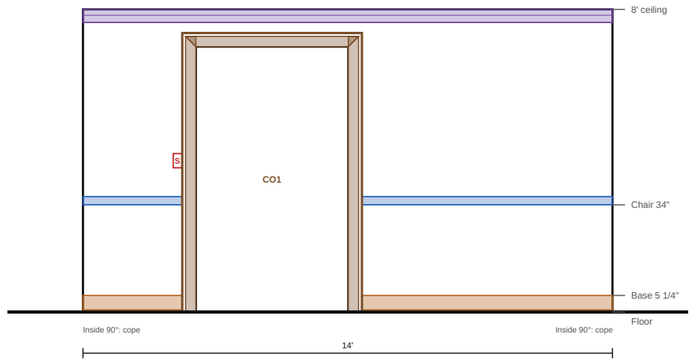


2 **R1, 2 LIVING ROOM, WALL 2 (14')**

SCALE: 1/4" = 1'-0"

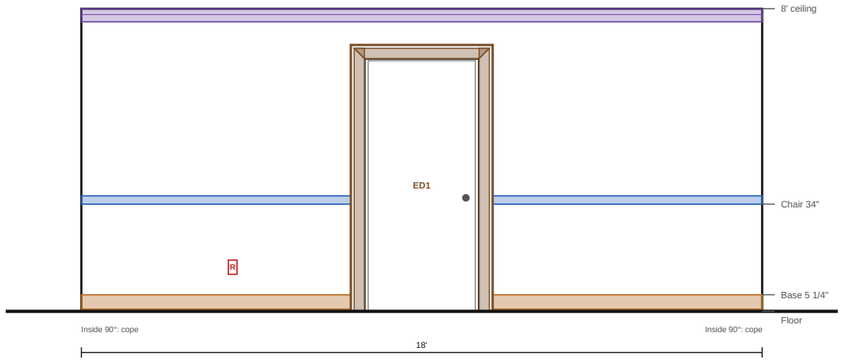

3 **R1, 3 LIVING ROOM, WALL 3 (18')**

SCALE: 1/4" = 1'-0"

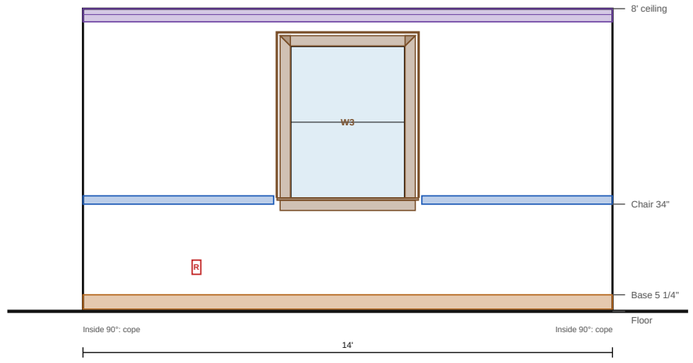

4 **R1, 4 LIVING ROOM, WALL 4 (14')**

SCALE: 1/4" = 1'-0"

PREPARED BY

Sample Contracting Co.
100 Main St, Anytown

PROJECT

Living, dining and foyer stair
Client: Sample client
123 Example St

NOTICE

FOR ESTIMATING AND LAYOUT ONLY.
Not an engineered design. Code figures are defaults: verify with the building department. Verify dimensions in the field; saw settings are from the geometry: verify each with a test cut.

REVISIONS

REV	DATE	DESCRIPTION
0	10/18/2026	Issued for review

DATE
10/18/2026


SCALE
1/4" = 1'-0"

DRAWN BY
SC

SHEET SIZE
ANSI B (11" x 17")


SHEET TITLE
WALL ELEVATIONS (1)

FC-2

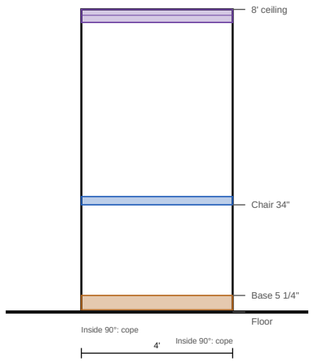


1 R2, 1 HALL, WALL 1 (4')

SCALE: 1/4" = 1'-0"

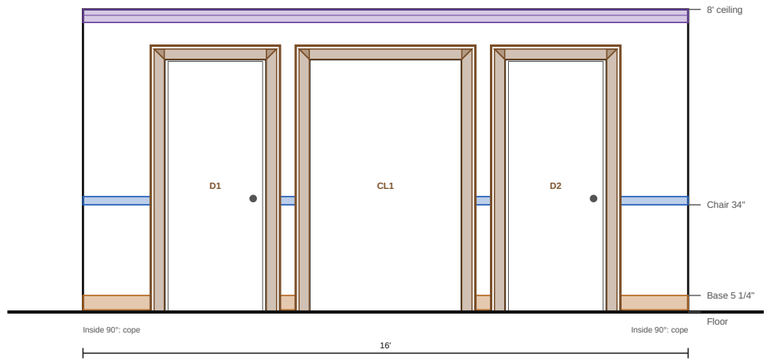


2 R2, 2 HALL, WALL 2 (16')

SCALE: 1/4" = 1'-0"

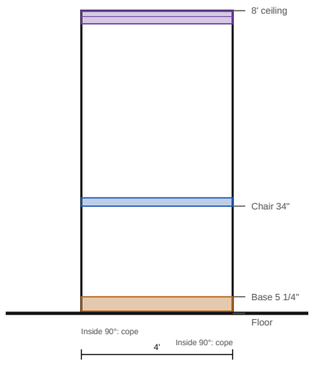

3 R2, 3 HALL, WALL 3 (4')

SCALE: 1/4" = 1'-0"

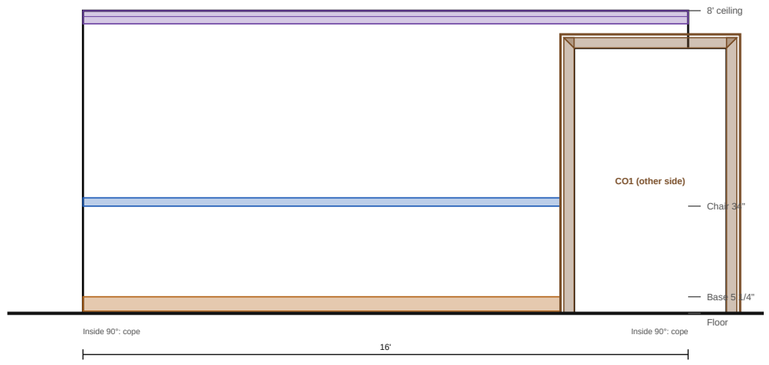

4 R2, 4 HALL, WALL 4 (16')

SCALE: 1/4" = 1'-0"

PREPARED BY

Sample Contracting Co.
100 Main St, Anytown

PROJECT

Living, dining and foyer stair
Client: Sample client
123 Example St

NOTICE

FOR ESTIMATING AND LAYOUT ONLY.
Not an engineered design. Code figures are defaults: verify with the building department. Verify dimensions in the field; saw settings are from the geometry: verify each with a test cut.

REVISIONS

REV	DATE	DESCRIPTION
0	10/18/2026	Issued for review

DATE
10/18/2026


SCALE
1/4" = 1'-0"

DRAWN BY
SC

SHEET SIZE
ANSI B (11" x 17")


SHEET TITLE
WALL ELEVATIONS (2)

FC-3

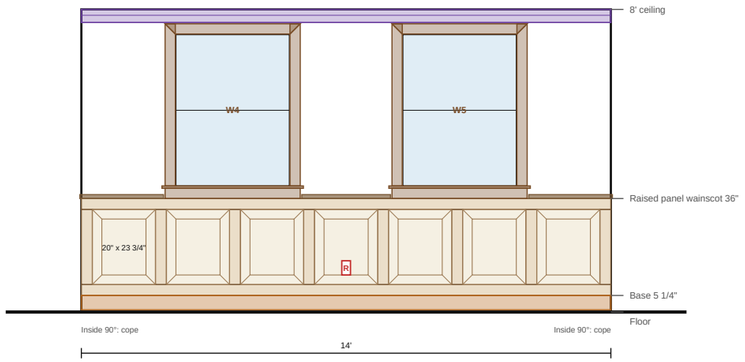


1 R3, 1 DINING ROOM, WALL 1 (14')

SCALE: 1/4" = 1'-0"

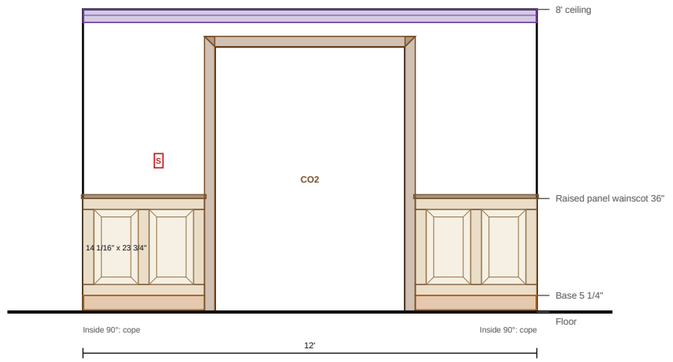


2 R3, 2 DINING ROOM, WALL 2 (12')

SCALE: 1/4" = 1'-0"

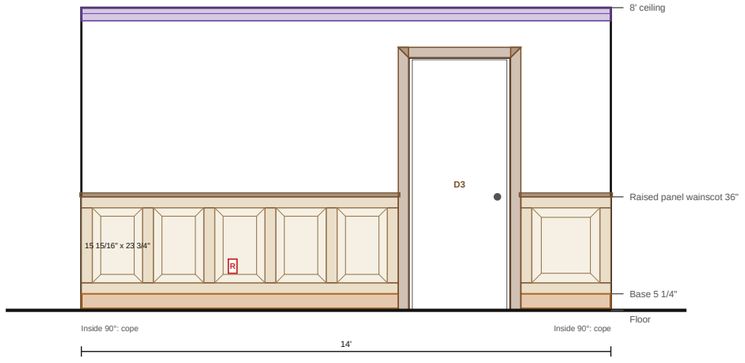

3 R3, 3 DINING ROOM, WALL 3 (14')

SCALE: 1/4" = 1'-0"

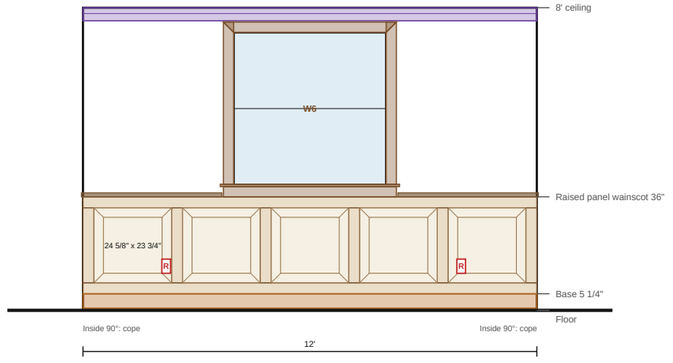

4 R3, 4 DINING ROOM, WALL 4 (12')

SCALE: 1/4" = 1'-0"

PREPARED BY

Sample Contracting Co.
100 Main St, Anytown

PROJECT

Living, dining and foyer stair
Client: Sample client
123 Example St

NOTICE

FOR ESTIMATING AND LAYOUT ONLY.
Not an engineered design. Code figures are defaults: verify with the building department. Verify dimensions in the field; saw settings are from the geometry: verify each with a test cut.

REVISIONS

REV	DATE	DESCRIPTION
0	10/18/2026	Issued for review

DATE
10/18/2026


SCALE
1/4" = 1'-0"

DRAWN BY
SC

SHEET SIZE
ANSI B (11" x 17")


SHEET TITLE
WALL ELEVATIONS (3)

FC-4

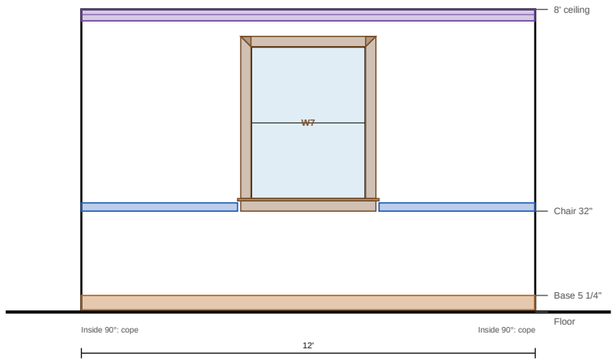


1 R4, 1 FOYER, WALL 1 (12')

SCALE: 1/4" = 1'-0"

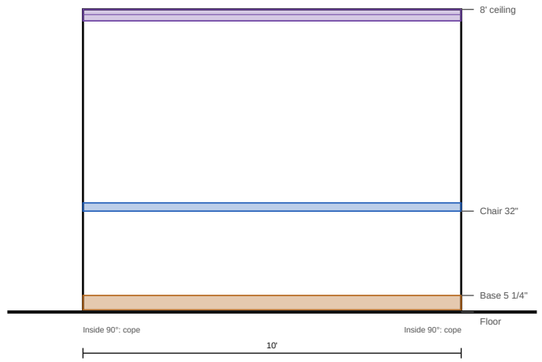


2 R4, 2 FOYER, WALL 2 (10')

SCALE: 1/4" = 1'-0"

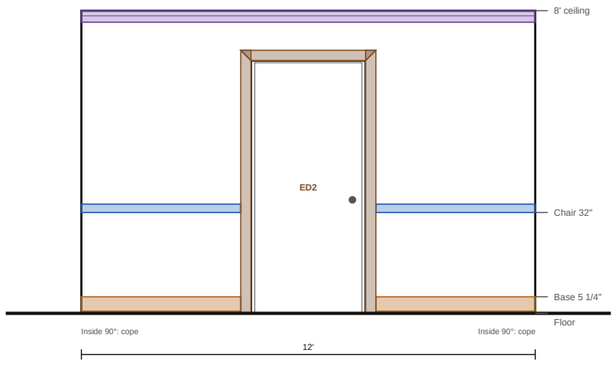

3 R4, 3 FOYER, WALL 3 (12')

SCALE: 1/4" = 1'-0"

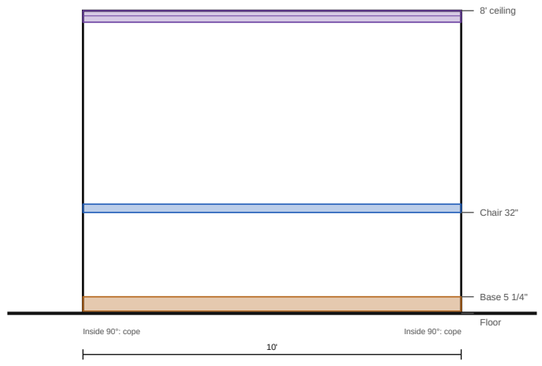

4 R4, 4 FOYER, WALL 4 (10')

SCALE: 1/4" = 1'-0"

PREPARED BY
Sample Contracting Co.
100 Main St, Anytown

PROJECT
Living, dining and foyer stair
Client: Sample client
123 Example St

NOTICE

FOR ESTIMATING AND LAYOUT ONLY.
Not an engineered design. Code figures are defaults: verify with the building department. Verify dimensions in the field; saw settings are from the geometry: verify each with a test cut.

REVISIONS

REV	DATE	DESCRIPTION
0	10/18/2026	Issued for review

DATE
10/18/2026


SCALE
1/4" = 1'-0"


DRAWN BY
SC

SHEET SIZE
ANSI B (11" x 17")

SHEET TITLE
WALL ELEVATIONS (4)

FC-5

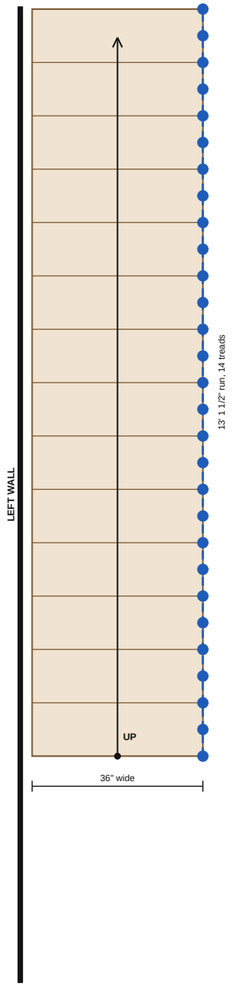

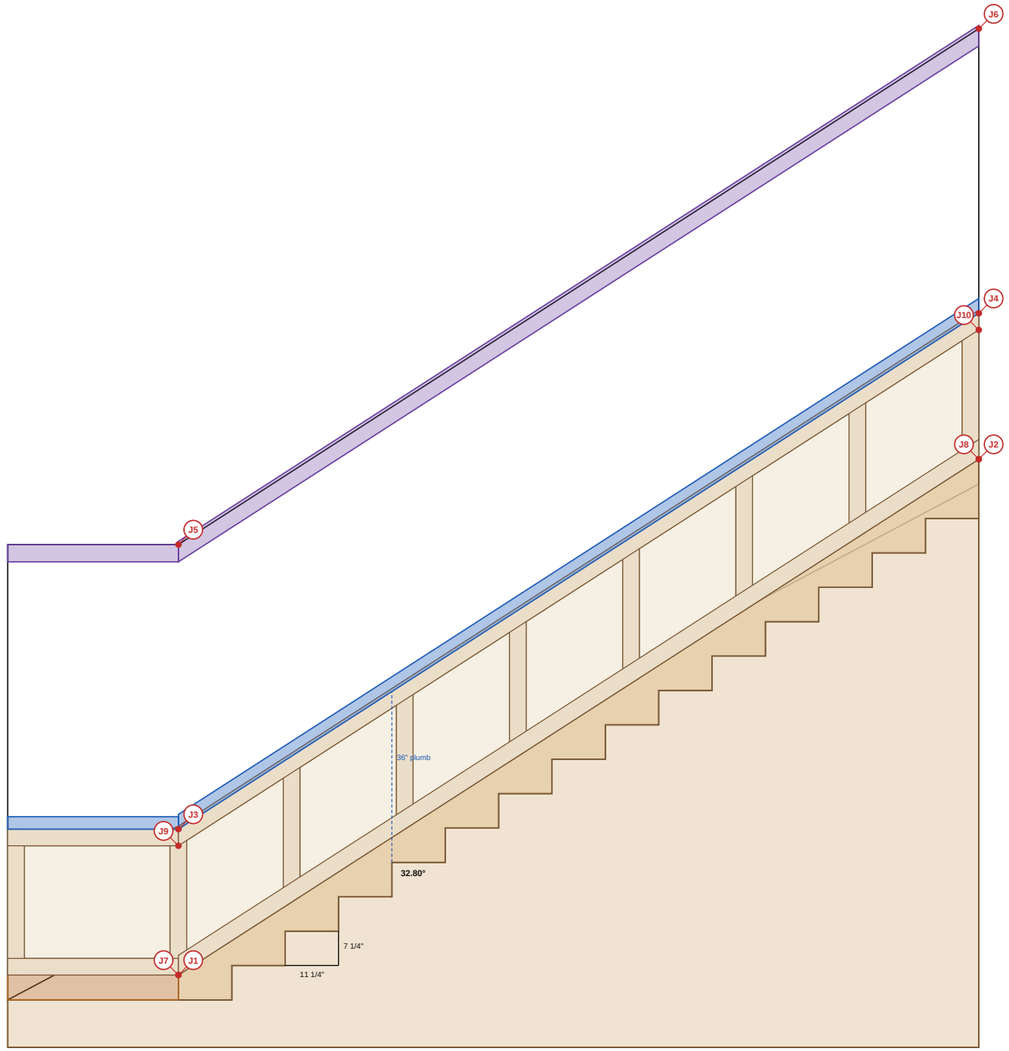

1 S1 PLAN

SCALE: 3/8" = 1'-0"

2 S1 LEFT WALL (UNFOLDED, JOINTS J1...)

SCALE: 3/8" = 1'-0"

15 risers of 7 1/4", treads 11 1/4", pitch 32.80°. Riser and tread limits are code defaults to verify locally.

PREPARED BY

Sample Contracting Co.
100 Main St, Anytown

PROJECT

Living, dining and foyer stair
Client: Sample client
123 Example St

NOTICE

FOR ESTIMATING AND LAYOUT ONLY.
Not an engineered design. Code figures are defaults: verify with the building department. Verify dimensions in the field; saw settings are from the geometry: verify each with a test cut.

REVISIONS

REV	DATE	DESCRIPTION
0	10/18/2026	Issued for review

DATE
10/18/2026

SCALE
As noted

DRAWN BY
SC


SHEET SIZE
ANSI B (11" x 17")

SHEET TITLE
S1 MAIN STAIR: PLAN AND WALLS

FC-6

J1 Base to skirt, level to rake x1

in the wall plane, 32.80° change

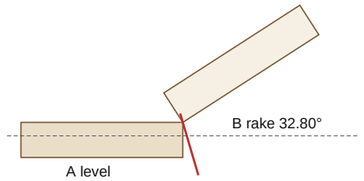

32.80° change: each piece 16.40°


PIECE A (LEVEL)
Miter 16.40°, bevel 0.00°
Face up, back flat on the table
Miter 0.00°, bevel 16.40°
On edge: back against the fence, bottom edge on the table
long point on the back, bottom edge

PIECE B (RAKE 32.80°)
Miter 16.40°, bevel 0.00°
Face up, back flat on the table
Miter 0.00°, bevel 16.40°
On edge: back against the fence, bottom edge on the table
long point on the back, bottom edge

VERIFY WITH A TEST CUT.

J2 Base to skirt, top inside corner x1

inside 90° corner

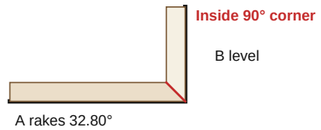

profiles differ 1"


PIECE A (RAKE 32.80°)
Miter 49.95°, bevel 22.52°
On edge: back against the fence, bottom edge on the table
Miter 32.80°, bevel 45.00°
Face up, back flat on the table
long point on the back, top edge, 3 3/8" past the wall line

PIECE B (LEVEL)
Miter 45.00°, bevel 0.00°
On edge: back against the fence, bottom edge on the table
Miter 0.00°, bevel 45.00°
Face up, back flat on the table
long point on the back, bottom edge

VERIFY WITH A TEST CUT.

J3 Chair rail, level to rake x1

in the wall plane, 32.80° change

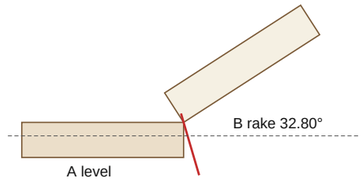

32.80° change: each piece 16.40°


PIECE A (LEVEL)
Miter 16.40°, bevel 0.00°
Face up, back flat on the table
Miter 0.00°, bevel 16.40°
On edge: back against the fence, bottom edge on the table
long point on the back, bottom edge

PIECE B (RAKE 32.80°)
Miter 16.40°, bevel 0.00°
Face up, back flat on the table
Miter 0.00°, bevel 16.40°
On edge: back against the fence, bottom edge on the table
long point on the back, bottom edge

VERIFY WITH A TEST CUT.

J4 Chair rail, top inside corner x1

inside 90° corner

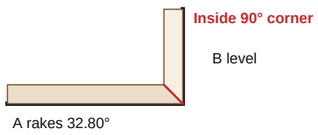

profiles differ 1/2"


PIECE A (RAKE 32.80°)
Miter 49.95°, bevel 22.52°
On edge: back against the fence, bottom edge on the table
Miter 32.80°, bevel 45.00°
Face up, back flat on the table
long point on the back, top edge, 1 11/16" past the wall line

PIECE B (LEVEL)
Miter 45.00°, bevel 0.00°
On edge: back against the fence, bottom edge on the table
Miter 0.00°, bevel 45.00°
Face up, back flat on the table
long point on the back, bottom edge

VERIFY WITH A TEST CUT.

J5 Crown, level to rake x1

in the wall plane, 32.80° change

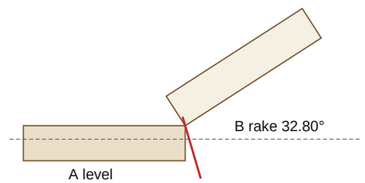

32.80° change: each piece 16.40°


PIECE A (LEVEL)
Miter 13.06°, bevel 10.01°
Laid flat: back down on the table, ceiling edge against the fence
Miter 0.00°, bevel 16.40°
Nested upside down at its spring angle: ceiling flat on the table, wall flat against the fence
long point on the bottom (wall) edge

PIECE B (RAKE 32.80°)
Miter 13.06°, bevel 10.01°
Laid flat: back down on the table, ceiling edge against the fence
Miter 0.00°, bevel 16.40°
Nested upside down at its spring angle: ceiling flat on the table, wall flat against the fence
long point on the bottom (wall) edge

VERIFY WITH A TEST CUT.

J6 Crown, top inside corner x1

inside 90° corner

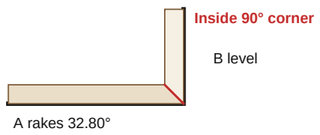

profiles differ 11/16"

PIECE A (RAKE 32.80°)
Miter 12.66°, bevel 52.47° (past the saw)
Laid flat: back down on the table, ceiling edge against the fence
Miter 49.95°, bevel 22.52°
Nested upside down at its spring angle: ceiling flat on the table, wall flat against the fence
long point on the bottom (wall) edge

PIECE B (LEVEL)
Miter 31.62°, bevel 33.86°
Laid flat: back down on the table, ceiling edge against the fence
Miter 45.00°, bevel 0.00°
Nested upside down at its spring angle: ceiling flat on the table, wall flat against the fence
long point on the bottom (wall) edge

VERIFY WITH A TEST CUT.

PREPARED BY
Sample Contracting Co.
100 Main St, Anytown

PROJECT
Living, dining and foyer stair
Client: Sample client
123 Example St

NOTICE
FOR ESTIMATING AND LAYOUT ONLY.
Not an engineered design. Code figures are defaults: verify with the building department. Verify dimensions in the field; saw settings are from the geometry: verify each with a test cut.

REVISIONS

REV	DATE	DESCRIPTION
0	10/18/2026	Issued for review

DATE
10/18/2026

SCALE
NTS

DRAWN BY
SC


SHEET SIZE
ANSI B (11" x 17")

SHEET TITLE
S1 JOINT DETAILS (1)

FC-7

J7 Panel bottom rail, level to rake x1

in the wall plane, 32.80° change

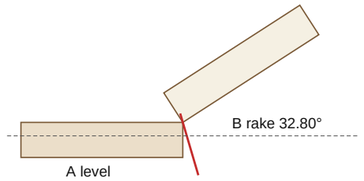

32.80° change: each piece 16.40°


PIECE A (LEVEL)
Miter 16.40°, bevel 0.00°
Face up, back flat on the table
Miter 0.00°, bevel 16.40°
On edge: back against the fence, bottom edge on the table
long point on the back, bottom edge

PIECE B (RAKE 32.80°)
Miter 16.40°, bevel 0.00°
Face up, back flat on the table
Miter 0.00°, bevel 16.40°
On edge: back against the fence, bottom edge on the table
long point on the back, bottom edge

VERIFY WITH A TEST CUT.

J8 Panel bottom rail, top inside corner x1

inside 90° corner

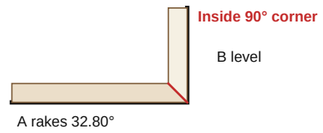

profiles differ 11/16"


PIECE A (RAKE 32.80°)
Miter 49.95°, bevel 22.52°
On edge: back against the fence, bottom edge on the table
Miter 32.80°, bevel 45.00°
Face up, back flat on the table
long point on the back, top edge, 2 1/4" past the wall line

PIECE B (LEVEL)
Miter 45.00°, bevel 0.00°
On edge: back against the fence, bottom edge on the table
Miter 0.00°, bevel 45.00°
Face up, back flat on the table
long point on the back, bottom edge

VERIFY WITH A TEST CUT.

J9 Panel top rail, level to rake x1

in the wall plane, 32.80° change

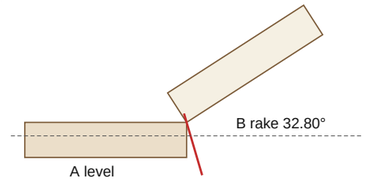

32.80° change: each piece 16.40°


PIECE A (LEVEL)
Miter 16.40°, bevel 0.00°
Face up, back flat on the table
Miter 0.00°, bevel 16.40°
On edge: back against the fence, bottom edge on the table
long point on the back, bottom edge

PIECE B (RAKE 32.80°)
Miter 16.40°, bevel 0.00°
Face up, back flat on the table
Miter 0.00°, bevel 16.40°
On edge: back against the fence, bottom edge on the table
long point on the back, bottom edge

VERIFY WITH A TEST CUT.

J10 Panel top rail, top inside corner x1

inside 90° corner

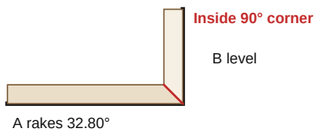

profiles differ 11/16"

PIECE A (RAKE 32.80°)
Miter 49.95°, bevel 22.52°
On edge: back against the fence, bottom edge on the table
Miter 32.80°, bevel 45.00°
Face up, back flat on the table
long point on the back, top edge, 2 1/4" past the wall line

PIECE B (LEVEL)
Miter 45.00°, bevel 0.00°
On edge: back against the fence, bottom edge on the table
Miter 0.00°, bevel 45.00°
Face up, back flat on the table
long point on the back, bottom edge

VERIFY WITH A TEST CUT.

PREPARED BY

Sample Contracting Co.
100 Main St, Anytown

PROJECT

Living, dining and foyer stair
Client: Sample client
123 Example St

NOTICE

FOR ESTIMATING AND LAYOUT ONLY.
Not an engineered design. Code figures are defaults: verify with the building department. Verify dimensions in the field; saw settings are from the geometry: verify each with a test cut.

REVISIONS

REV	DATE	DESCRIPTION
0	10/18/2026	Issued for review

DATE
10/18/2026

SCALE
NTS

DRAWN BY
SC

SHEET SIZE
ANSI B (11" x 17")

SHEET TITLE
S1 JOINT DETAILS (2)

FC-8

S1 SKIRT NOTCH LAYOUT: MEASURE ALONG THE TOP EDGE FROM THE BOTTOM END, SQUARE DOWN. PLUMB CUTS 32.80° OFF SQUARE, LEVEL CUTS 57.20° OFF SQUARE.

WALL	CUT	LENGTH	FROM (ALONG / DOWN)	TO (ALONG / DOWN)
Left wall	Riser 1: plumb cut	7 1/4"	6 5/8" / 10 1/2"	10 9/16" / 4 7/16"
Left wall	Tread 1: level cut	11 1/4"	10 9/16" / 4 7/16"	20" / 10 1/2"
Left wall	Riser 2: plumb cut	7 1/4"	20" / 10 1/2"	23 15/16" / 4 7/16"
Left wall	Tread 2: level cut	11 1/4"	23 15/16" / 4 7/16"	33 3/8" / 10 1/2"
Left wall	Riser 3: plumb cut	7 1/4"	33 3/8" / 10 1/2"	37 5/16" / 4 7/16"
Left wall	Tread 3: level cut	11 1/4"	37 5/16" / 4 7/16"	46 3/4" / 10 1/2"
Left wall	Riser 4: plumb cut	7 1/4"	46 3/4" / 10 1/2"	50 11/16" / 4 7/16"
Left wall	Tread 4: level cut	11 1/4"	50 11/16" / 4 7/16"	60 1/8" / 10 1/2"
Left wall	Riser 5: plumb cut	7 1/4"	60 1/8" / 10 1/2"	64 1/16" / 4 7/16"
Left wall	Tread 5: level cut	11 1/4"	64 1/16" / 4 7/16"	73 9/16" / 10 1/2"
Left wall	Riser 6: plumb cut	7 1/4"	73 9/16" / 10 1/2"	77 7/16" / 4 7/16"
Left wall	Tread 6: level cut	11 1/4"	77 7/16" / 4 7/16"	86 15/16" / 10 1/2"
Left wall	Riser 7: plumb cut	7 1/4"	86 15/16" / 10 1/2"	90 13/16" / 4 7/16"
Left wall	Tread 7: level cut	11 1/4"	90 13/16" / 4 7/16"	100 5/16" / 10 1/2"
Left wall	Riser 8: plumb cut	7 1/4"	100 5/16" / 10 1/2"	104 1/4" / 4 7/16"
Left wall	Tread 8: level cut	11 1/4"	104 1/4" / 4 7/16"	113 11/16" / 10 1/2"
Left wall	Riser 9: plumb cut	7 1/4"	113 11/16" / 10 1/2"	117 5/8" / 4 7/16"
Left wall	Tread 9: level cut	11 1/4"	117 5/8" / 4 7/16"	127 1/16" / 10 1/2"
Left wall	Riser 10: plumb cut	7 1/4"	127 1/16" / 10 1/2"	131" / 4 7/16"
Left wall	Tread 10: level cut	11 1/4"	131" / 4 7/16"	140 7/16" / 10 1/2"
Left wall	Riser 11: plumb cut	7 1/4"	140 7/16" / 10 1/2"	144 3/8" / 4 7/16"
Left wall	Tread 11: level cut	11 1/4"	144 3/8" / 4 7/16"	153 13/16" / 10 1/2"
Left wall	Riser 12: plumb cut	7 1/4"	153 13/16" / 10 1/2"	157 3/4" / 4 7/16"
Left wall	Tread 12: level cut	11 1/4"	157 3/4" / 4 7/16"	167 3/16" / 10 1/2"
Left wall	Riser 13: plumb cut	7 1/4"	167 3/16" / 10 1/2"	171 1/8" / 4 7/16"
Left wall	Tread 13: level cut	11 1/4"	171 1/8" / 4 7/16"	180 5/8" / 10 1/2"
Left wall	Riser 14: plumb cut	7 1/4"	180 5/8" / 10 1/2"	184 1/2" / 4 7/16"
Left wall	Tread 14: level cut	11 1/4"	184 1/2" / 4 7/16"	194" / 10 1/2"
Left wall	Riser 15: plumb cut	7 1/4"	194" / 10 1/2"	197 15/16" / 4 7/16"

PREPARED BY

Sample Contracting Co.
100 Main St, Anytown

PROJECT

Living, dining and foyer stair
Client: Sample client
123 Example St

NOTICE

FOR ESTIMATING AND LAYOUT ONLY.
Not an engineered design. Code figures are defaults: verify with the building department. Verify dimensions in the field; saw settings are from the geometry: verify each with a test cut.

REVISIONS

REV	DATE	DESCRIPTION
0	10/18/2026	Issued for review

DATE
10/18/2026

SCALE
NTS

DRAWN BY
SC

SHEET SIZE
ANSI B (11" x 17")

SHEET TITLE
S1 SKIRT NOTCH LAYOUT

FC-9

SCHEDULES & BUY LIST

TAG	ROOM	PACKAGE	HEIGHT, WALLS	TRIM LF	CASING; WALL TREATMENTS
ROOM SCHEDULE					
R1	Living room	Traditional with crown	8', 64 LF	base 55.5, shoe 55.5, chair 43.8, crown 64	1 door (both sides), 1 one-side, 3 windows
R2	Hall	Traditional with crown	8', 40 LF	base 25, shoe 25, chair 25, crown 40	2 doors (both sides), 1 one-side
R3	Dining room	Dining: raised panel wainscot	8', 52 LF	base 43.2, shoe 43.2, crown 52	2 doors (both sides), 3 windows; Raised panel wainscot 110.7 sf
R4	Foyer	Colonial	8', 44 LF	base 40.4, shoe 40.4, chair 36.7, crown 44	1 one-side, 1 window

OPENINGS AND CASING

TAG	WHERE	TYPE	SIZE	TRIM	PIECES (LONG POINTS)
W1	R1 wall 1	Window	36" x 48", sill 36"	Stool and apron, Colonial casing 3 1/4, mitered with a backband	stool 44 7/8", apron 42 7/8", 2 x leg 51 7/16", head 42 7/8", 2 x backband leg 52 1/2", backband head 45"
W2	R1 wall 1	Window	36" x 48", sill 36"	Stool and apron, Colonial casing 3 1/4, mitered with a backband	stool 44 7/8", apron 42 7/8", 2 x leg 51 7/16", head 42 7/8", 2 x backband leg 52 1/2", backband head 45"
CO1	R1 wall 2	Cased opening	48" x 84"	Colonial casing 3 1/4, mitered with a backband, both sides	4 x leg 87 7/16", 2 x head 54 7/8", 4 x backband leg 88 1/2", 2 x backband head 57"
ED1	R1 wall 3	Exterior door	36" x 80"	Colonial casing 3 1/4, mitered with a backband, one side	2 x leg 83 7/16", head 42 7/8", 2 x backband leg 84 1/2", backband head 45"
W3	R1 wall 4	Window	36" x 48", sill 36"	Stool and apron, Colonial casing 3 1/4, mitered with a backband	stool 44 7/8", apron 42 7/8", 2 x leg 51 7/16", head 42 7/8", 2 x backband leg 52 1/2", backband head 45"
D1	R2 wall 2	Interior door	32" x 80"	Colonial casing 3 1/4, mitered with a backband, both sides	4 x leg 83 7/16", 2 x head 38 7/8", 4 x backband leg 84 1/2", 2 x backband head 41"
CL1	R2 wall 2	Closet opening	48" x 80"	Colonial casing 3 1/4, mitered with a backband, one side	2 x leg 83 7/16", head 54 7/8", 2 x backband leg 84 1/2", backband head 57"
D2	R2 wall 2	Interior door	32" x 80"	Colonial casing 3 1/4, mitered with a backband, both sides	4 x leg 83 7/16", 2 x head 38 7/8", 4 x backband leg 84 1/2", 2 x backband head 41"
W4	R3 wall 1	Window	36" x 48", sill 40"	Stool and apron, Colonial casing 3 1/4, mitered at the head	stool 44 7/8", apron 42 7/8", 2 x leg 51 7/16", head 42 7/8"
W5	R3 wall 1	Window	36" x 48", sill 40"	Stool and apron, Colonial casing 3 1/4, mitered at the head	stool 44 7/8", apron 42 7/8", 2 x leg 51 7/16", head 42 7/8"
CO2	R3 wall 2	Cased opening	60" x 84"	Colonial casing 3 1/4, mitered at the head, both sides	4 x leg 87 7/16", 2 x head 66 7/8"
D3	R3 wall 3	Interior door	32" x 80"	Colonial casing 3 1/4, mitered at the head, both sides	4 x leg 83 7/16", 2 x head 38 7/8"
W6	R3 wall 4	Window	48" x 48", sill 40"	Stool and apron, Colonial casing 3 1/4, mitered at the head	stool 56 7/8", apron 54 7/8", 2 x leg 51 7/16", head 54 7/8"
W7	R4 wall 1	Window	36" x 48", sill 36"	Stool and apron, Colonial casing 3 1/4, mitered at the head	stool 44 7/8", apron 42 7/8", 2 x leg 51 7/16", head 42 7/8"
ED2	R4 wall 3	Exterior door	36" x 80"	Colonial casing 3 1/4, mitered at the head, one side	2 x leg 83 7/16", head 42 7/8"

CORNERS AND SAW SETTINGS (INSIDE: COPE; OUTSIDE: MITER). VERIFY WITH A TEST CUT.

PROFILE	CORNER	COUNT	SETTINGS
Colonial base 5 1/4	Inside 90 deg	15	Miter 45.00° (cope)
Base shoe	Inside 90 deg	15	Miter 45.00° (cope)
Chair rail 2 5/8	Inside 90 deg	11	Miter 45.00° (cope)
Crown 5 1/4 (52/38)	Inside 90 deg	12	Laid flat: miter 31.62°, bevel 33.86°; nested: miter 45.00°; cope from the nested miter
Crown 4 5/8 (52/38)	Inside 90 deg	4	Laid flat: miter 31.62°, bevel 33.86°; nested: miter 45.00°; cope from the nested miter

WALL TREATMENTS

WALL	TREATMENT	TOP	AREA	MEMBERS
R3, 1	Raised panel wainscot	36"	35.9 sf	7 panels
R3, 2	Raised panel wainscot	36"	16.5 sf	4 panels
R3, 3	Raised panel wainscot	36"	27.6 sf	6 panels
R3, 4	Raised panel wainscot	36"	30.8 sf	5 panels

BUY LIST

ITEM	QTY	NOTE	COST
Colonial base 5 1/4, 16 ft	12 sticks	10 nested + 2 spare	$355
Colonial base 5 1/4, 14 ft	1 stick	1 nested	$26
Base shoe, 16 ft	12 sticks	10 nested + 2 spare	$86
Base shoe, 12 ft	1 stick	1 nested	$5
Chair rail 2 5/8, 16 ft	9 sticks	8 nested + 1 spare	$230
Chair rail 2 5/8, 8 ft	1 stick	1 nested	$13
Crown 5 1/4 (52/38), 16 ft	6 sticks	4 nested + 2 spare	$346
Crown 5 1/4 (52/38), 14 ft	4 sticks	4 nested	$202
Crown 5 1/4 (52/38), 10 ft	6 sticks	6 nested	$216
Crown 4 5/8 (52/38), 16 ft	3 sticks	2 nested + 1 spare	$154
Crown 4 5/8 (52/38), 14 ft	1 stick	1 nested	$45
Crown 4 5/8 (52/38), 12 ft	2 sticks	2 nested	$77
Window stool 1x (bullnosed), 16 ft	2 sticks	1 nested + 1 spare	$112
Window stool 1x (bullnosed), 14 ft	1 stick	1 nested	$49
Colonial casing 3 1/4, 16 ft	20 sticks	17 nested + 3 spare	$480
Colonial casing 3 1/4, 14 ft	8 sticks	8 nested	$168
Backband 1 1/16, 16 ft	13 sticks	11 nested + 2 spare	$250
Backband 1 1/16, 14 ft	2 sticks	2 nested	$34
1x4 (3 1/2), 16 ft	13 sticks	11 nested + 2 spare	$250
1x4 (3 1/2), 8 ft	1 stick	1 nested	$10
Wainscot cap with a ledge, 16 ft	3 sticks	2 nested + 1 spare	$91
Raised panel (MDF, made to size)	77 sf	22 panels in all, made to the sizes on the cut list	$539
1x12 skirt board (11 1/4), 16 ft	3 sticks	2 nested + 1 spare	$216
Raised panel (MDF, made to size)	32 sf	8 raked panels (cut to the shapes on the stair sheet)	$224
Baluster	31 each		$372
Newel post	2 each		$300
Stair handrail, 16 ft	2 sticks	15.6 LF on the open sides	$576
Finish nails / pins, 15 and 18 ga	2 boxes	1,056 LF of trim	$36

PREPARED BY

Sample Contracting Co.

100 Main St, Anytown

PROJECT

Living, dining and foyer stair

Client: Sample client

123 Example St

NOTICE

FOR ESTIMATING AND LAYOUT ONLY.
Not an engineered design. Code figures are defaults: verify with the building department. Verify dimensions in the field; saw settings are from the geometry: verify each with a test cut.

REVISIONS

REV	DATE	DESCRIPTION
0	10/18/2026	Issued for review

DATE
10/18/2026

SCALE
NTS

DRAWN BY
SC

SHEET SIZE
ANSI B (11" x 17")

SHEET TITLE
SCHEDULES & BUY LIST (1)

FC-10

SCHEDULES & BUY LIST

ITEM	QTY	NOTE	COST
Wood glue and CA glue for miters	4 kits	miters, copes and stair joints	$64
Paintable caulk	18 tubes	paint-grade joints and top edges	$108
Construction adhesive (panels, battens)	5 tubes	panels, battens and sheets	$35
MATERIAL TOTAL			$5,667

PREPARED BY

Sample Contracting Co.

100 Main St, Anytown

PROJECT

Living, dining and foyer stair

Client: Sample client

123 Example St

NOTICE

FOR ESTIMATING AND LAYOUT ONLY.
Not an engineered design. Code figures are defaults: verify with the building department. Verify dimensions in the field; saw settings are from the geometry: verify each with a test cut.

REVISIONS

REV	DATE	DESCRIPTION
0	10/18/2026	Issued for review

DATE
10/18/2026

SCALE
NTS

DRAWN BY
SC

SHEET SIZE
ANSI B (11" x 17")

SHEET TITLE

SCHEDULES & BUY LIST (2)

FC-11

CUT LIST: EVERY PIECE AT ITS LONG POINT, NESTED INTO 8, 10, 12, 14, 16 FT STOCK (+1" A PIECE)

PROFILE	WHERE	PIECE	QTY	LENGTH	ENDS	FROM
Colonial base 5 1/4	R1 wall 1	Base	1	9' 1"	scarf / square	Stick 1 (16 ft, 1/4" left)
Colonial base 5 1/4	R2 wall 1	Base	1	4'	square / square	Stick 1 (16 ft, 1/4" left)
Colonial base 5 1/4	R1 wall 2	Base	1	2' 7 1/2"	coped / square	Stick 1 (16 ft, 1/4" left)
Colonial base 5 1/4	R1 wall 4	Base	1	14'	coped / square	Stick 2 (16 ft, 3/8" left)
Colonial base 5 1/4	R2 wall 2	Base	1	1' 9 1/2"	coped / square	Stick 2 (16 ft, 3/8" left)
Colonial base 5 1/4	R3 wall 1	Base	1	14'	coped / square	Stick 3 (16 ft, 3/8" left)
Colonial base 5 1/4	R2 wall 2	Base	1	1' 9 1/2"	square / square	Stick 3 (16 ft, 3/8" left)
Colonial base 5 1/4	R2 wall 4	Base	1	12' 7 1/2"	coped / square	Stick 4 (16 ft, 3/8" left)
Colonial base 5 1/4	S1 Left wall	Base (level)	1	3'	joint details on the stair sheet	Stick 4 (16 ft, 3/8" left)
Colonial base 5 1/4	R3 wall 4	Base	1	12'	coped / square	Stick 5 (16 ft, 1 1/4" left)
Colonial base 5 1/4	R3 wall 2	Base	1	3' 2 9/16"	coped / square	Stick 5 (16 ft, 1 1/4" left)
Colonial base 5 1/4	R2 wall 2	Base	1	5"	square / square	Stick 5 (16 ft, 1 1/4" left)
Colonial base 5 1/4	R4 wall 1	Base	1	12'	coped / square	Stick 6 (16 ft, 1 1/4" left)
Colonial base 5 1/4	R3 wall 2	Base	1	3' 2 9/16"	square / square	Stick 6 (16 ft, 1 1/4" left)
Colonial base 5 1/4	R2 wall 2	Base	1	5"	square / square	Stick 6 (16 ft, 1 1/4" left)
Colonial base 5 1/4	R1 wall 1	Base	1	9' 1"	coped / scarf	Stick 7 (16 ft, 1 3/8" left)
Colonial base 5 1/4	R1 wall 2	Base	1	6' 7 1/2"	square / square	Stick 7 (16 ft, 1 3/8" left)
Colonial base 5 1/4	R3 wall 3	Base	1	8' 4 9/16"	coped / square	Stick 8 (16 ft, 3 7/8" left)
Colonial base 5 1/4	R1 wall 3	Base	1	7' 1 1/2"	coped / square	Stick 8 (16 ft, 3 7/8" left)
Colonial base 5 1/4	R4 wall 2	Base	1	10'	coped / square	Stick 9 (16 ft, 1' 7 3/8" left)
Colonial base 5 1/4	R4 wall 3	Base	1	4' 2 9/16"	coped / square	Stick 9 (16 ft, 1' 7 3/8" left)
Colonial base 5 1/4	R4 wall 4	Base	1	10'	coped / square	Stick 10 (16 ft, 1' 7 3/8" left)
Colonial base 5 1/4	R4 wall 3	Base	1	4' 2 9/16"	square / square	Stick 10 (16 ft, 1' 7 3/8" left)
Colonial base 5 1/4	R1 wall 3	Base	1	7' 1 1/2"	square / square	Stick 11 (14 ft, 2 3/4" left)
Colonial base 5 1/4	R2 wall 3	Base	1	4'	coped / square	Stick 11 (14 ft, 2 3/4" left)
Colonial base 5 1/4	R3 wall 3	Base	1	2' 4 9/16"	square / square	Stick 11 (14 ft, 2 3/4" left)
Base shoe	R1 wall 1	Shoe	1	9' 1"	scarf / square	Stick 1 (16 ft, 1/4" left)
Base shoe	R2 wall 1	Shoe	1	4'	square / square	Stick 1 (16 ft, 1/4" left)
Base shoe	R1 wall 2	Shoe	1	2' 7 1/2"	coped / square	Stick 1 (16 ft, 1/4" left)
Base shoe	R1 wall 4	Shoe	1	14'	coped / square	Stick 2 (16 ft, 3/8" left)
Base shoe	R2 wall 2	Shoe	1	1' 9 1/2"	coped / square	Stick 2 (16 ft, 3/8" left)
Base shoe	R3 wall 1	Shoe	1	14'	coped / square	Stick 3 (16 ft, 3/8" left)
Base shoe	R2 wall 2	Shoe	1	1' 9 1/2"	square / square	Stick 3 (16 ft, 3/8" left)
Base shoe	R3 wall 4	Shoe	1	12'	coped / square	Stick 4 (16 ft, 1 1/4" left)
Base shoe	R3 wall 2	Shoe	1	3' 2 9/16"	coped / square	Stick 4 (16 ft, 1 1/4" left)
Base shoe	R2 wall 2	Shoe	1	5"	square / square	Stick 4 (16 ft, 1 1/4" left)
Base shoe	R4 wall 1	Shoe	1	12'	coped / square	Stick 5 (16 ft, 1 1/4" left)
Base shoe	R3 wall 2	Shoe	1	3' 2 9/16"	square / square	Stick 5 (16 ft, 1 1/4" left)
Base shoe	R2 wall 2	Shoe	1	5"	square / square	Stick 5 (16 ft, 1 1/4" left)
Base shoe	R1 wall 1	Shoe	1	9' 1"	coped / scarf	Stick 6 (16 ft, 1 3/8" left)
Base shoe	R1 wall 2	Shoe	1	6' 7 1/2"	square / square	Stick 6 (16 ft, 1 3/8" left)
Base shoe	R3 wall 3	Shoe	1	8' 4 9/16"	coped / square	Stick 7 (16 ft, 3 7/8" left)
Base shoe	R1 wall 3	Shoe	1	7' 1 1/2"	coped / square	Stick 7 (16 ft, 3 7/8" left)
Base shoe	R2 wall 4	Shoe	1	12' 7 1/2"	coped / square	Stick 8 (16 ft, 9 7/8" left)
Base shoe	R3 wall 3	Shoe	1	2' 4 9/16"	square / square	Stick 8 (16 ft, 9 7/8" left)
Base shoe	R4 wall 2	Shoe	1	10'	coped / square	Stick 9 (16 ft, 1' 7 3/8" left)
Base shoe	R4 wall 3	Shoe	1	4' 2 9/16"	coped / square	Stick 9 (16 ft, 1' 7 3/8" left)
Base shoe	R4 wall 4	Shoe	1	10'	coped / square	Stick 10 (16 ft, 1' 7 3/8" left)
Base shoe	R4 wall 3	Shoe	1	4' 2 9/16"	square / square	Stick 10 (16 ft, 1' 7 3/8" left)
Base shoe	R1 wall 3	Shoe	1	7' 1 1/2"	square / square	Stick 11 (12 ft, 8 3/8" left)
Base shoe	R2 wall 3	Shoe	1	4'	coped / square	Stick 11 (12 ft, 8 3/8" left)
Chair rail 2 5/8	S1 Left wall	Chair rail on the rake	1	16' 8 3/4"	joint details on the stair sheet	Stick 1 (16 ft, 0' left)
Chair rail 2 5/8	R2 wall 4	Chair rail	1	12' 7 1/2"	coped / square	Stick 2 (16 ft, 3/8" left)
Chair rail 2 5/8	S1 Left wall	Chair rail (level)	1	3'	joint details on the stair sheet	Stick 2 (16 ft, 3/8" left)
Chair rail 2 5/8	R2 wall 1	Chair rail	1	4'	square / square	Stick 3 (16 ft, 1" left)
Chair rail 2 5/8	R2 wall 3	Chair rail	1	4'	coped / square	Stick 3 (16 ft, 1" left)
Chair rail 2 5/8	R1 wall 1	Chair rail	1	3' 0 1/2"	coped / square	Stick 3 (16 ft, 1" left)
Chair rail 2 5/8	R1 wall 2	Chair rail	1	2' 7 1/2"	coped / square	Stick 3 (16 ft, 1" left)
Chair rail 2 5/8	R2 wall 2	Chair rail	1	1' 9 1/2"	coped / square	Stick 3 (16 ft, 1" left)
Chair rail 2 5/8	R1 wall 2	Chair rail	1	6' 7 1/2"	square / square	Stick 4 (16 ft, 2" left)
Chair rail 2 5/8	R4 wall 3	Chair rail	1	4' 2 9/16"	coped / square	Stick 4 (16 ft, 2" left)
Chair rail 2 5/8	R4 wall 3	Chair rail	1	4' 2 9/16"	square / square	Stick 4 (16 ft, 2" left)
Chair rail 2 5/8	R2 wall 2	Chair rail	1	5"	square / square	Stick 4 (16 ft, 2" left)
Chair rail 2 5/8	R4 wall 1	Chair rail	1	4' 1 9/16"	coped / square	Stick 5 (16 ft, 3" left)
Chair rail 2 5/8	R4 wall 1	Chair rail	1	4' 1 9/16"	square / square	Stick 5 (16 ft, 3" left)

PREPARED BY

Sample Contracting Co.
100 Main St, Anytown

PROJECT

Living, dining and foyer stair
Client: Sample client
123 Example St

NOTICE

FOR ESTIMATING AND LAYOUT ONLY.
Not an engineered design. Code figures are defaults: verify with the building department. Verify dimensions in the field; saw settings are from the geometry: verify each with a test cut.

REVISIONS

REV	DATE	DESCRIPTION
0	10/18/2026	Issued for review

DATE
10/18/2026

SCALE
NTS

DRAWN BY
SC

SHEET SIZE
ANSI B (11" x 17")

SHEET TITLE
CUT LIST (1)

FC-12

CUT LIST: EVERY PIECE AT ITS LONG POINT, NESTED INTO 8, 10, 12, 14, 16 FT STOCK (+1" A PIECE)

PROFILE	WHERE	PIECE	QTY	LENGTH	ENDS	FROM
Chair rail 2 5/8	R1 wall 1	Chair rail	1	4' 0 1/2"	square / square	Stick 5 (16 ft, 3" left)
Chair rail 2 5/8	R1 wall 1	Chair rail	1	3' 1"	square / square	Stick 5 (16 ft, 3" left)
Chair rail 2 5/8	R4 wall 2	Chair rail	1	10'	coped / square	Stick 6 (16 ft, 3 1/4" left)
Chair rail 2 5/8	R1 wall 4	Chair rail	1	5' 0 1/2"	coped / square	Stick 6 (16 ft, 3 1/4" left)
Chair rail 2 5/8	R2 wall 2	Chair rail	1	5"	square / square	Stick 6 (16 ft, 3 1/4" left)
Chair rail 2 5/8	R4 wall 4	Chair rail	1	10'	coped / square	Stick 7 (16 ft, 9 3/8" left)
Chair rail 2 5/8	R1 wall 4	Chair rail	1	5' 0 1/2"	square / square	Stick 7 (16 ft, 9 3/8" left)
Chair rail 2 5/8	R1 wall 3	Chair rail	1	7' 1 1/2"	coped / square	Stick 8 (16 ft, 1' 6 7/8" left)
Chair rail 2 5/8	R1 wall 3	Chair rail	1	7' 1 1/2"	square / square	Stick 8 (16 ft, 1' 6 7/8" left)
Chair rail 2 5/8	R2 wall 2	Chair rail	1	1' 9 1/2"	square / square	Stick 9 (8 ft, 6' 1 1/2" left)
Crown 5 1/4 (52/38)	R1 wall 2	Crown	1	14'	coped / square	Stick 1 (16 ft, 1' 11" left)
Crown 5 1/4 (52/38)	R1 wall 4	Crown	1	14'	coped / square	Stick 2 (16 ft, 1' 11" left)
Crown 5 1/4 (52/38)	R3 wall 1	Crown	1	14'	coped / square	Stick 3 (16 ft, 1' 11" left)
Crown 5 1/4 (52/38)	R3 wall 3	Crown	1	14'	coped / square	Stick 4 (16 ft, 1' 11" left)
Crown 5 1/4 (52/38)	R1 wall 1	Crown	1	9' 1"	coped / scarf	Stick 5 (14 ft, 8 7/8" left)
Crown 5 1/4 (52/38)	R2 wall 1	Crown	1	4'	coped / square	Stick 5 (14 ft, 8 7/8" left)
Crown 5 1/4 (52/38)	R1 wall 1	Crown	1	9' 1"	scarf / square	Stick 6 (14 ft, 8 7/8" left)
Crown 5 1/4 (52/38)	R2 wall 3	Crown	1	4'	coped / square	Stick 6 (14 ft, 8 7/8" left)
Crown 5 1/4 (52/38)	R3 wall 2	Crown	1	12'	coped / square	Stick 7 (14 ft, 1' 11" left)
Crown 5 1/4 (52/38)	R3 wall 4	Crown	1	12'	coped / square	Stick 8 (14 ft, 1' 11" left)
Crown 5 1/4 (52/38)	R1 wall 3	Crown	1	9' 1"	coped / scarf	Stick 9 (10 ft, 10" left)
Crown 5 1/4 (52/38)	R1 wall 3	Crown	1	9' 1"	scarf / square	Stick 10 (10 ft, 10" left)
Crown 5 1/4 (52/38)	R2 wall 2	Crown	1	8' 1"	coped / scarf	Stick 11 (10 ft, 1' 10" left)
Crown 5 1/4 (52/38)	R2 wall 2	Crown	1	8' 1"	scarf / square	Stick 12 (10 ft, 1' 10" left)
Crown 5 1/4 (52/38)	R2 wall 4	Crown	1	8' 1"	coped / scarf	Stick 13 (10 ft, 1' 10" left)
Crown 5 1/4 (52/38)	R2 wall 4	Crown	1	8' 1"	scarf / square	Stick 14 (10 ft, 1' 10" left)
Window stool 1x (bullnosed)	R1 wall 4	Stool W3	1	3' 8 7/8"	square, notched horns	Stick 1 (16 ft, 8 1/8" left)
Window stool 1x (bullnosed)	R3 wall 1	Stool W4	1	3' 8 7/8"	square, notched horns	Stick 1 (16 ft, 8 1/8" left)
Window stool 1x (bullnosed)	R3 wall 1	Stool W5	1	3' 8 7/8"	square, notched horns	Stick 1 (16 ft, 8 1/8" left)
Window stool 1x (bullnosed)	R4 wall 1	Stool W7	1	3' 8 7/8"	square, notched horns	Stick 1 (16 ft, 8 1/8" left)
Window stool 1x (bullnosed)	R3 wall 4	Stool W6	1	4' 8 7/8"	square, notched horns	Stick 2 (14 ft, 1' 6 1/8" left)
Window stool 1x (bullnosed)	R1 wall 1	Stool W1	1	3' 8 7/8"	square, notched horns	Stick 2 (14 ft, 1' 6 1/8" left)
Window stool 1x (bullnosed)	R1 wall 1	Stool W2	1	3' 8 7/8"	square, notched horns	Stick 2 (14 ft, 1' 6 1/8" left)
Colonial casing 3 1/4	R3 wall 2	Head CO2	2	5' 6 7/8"	miter 45° both ends	Stick 1 (16 ft, 1/8" left)
Colonial casing 3 1/4	R1 wall 2	Head CO1	1	4' 6 7/8"	miter 45° both ends	Stick 1 (16 ft, 1/8" left)
Colonial casing 3 1/4	R1 wall 2	Leg CO1	2	7' 3 7/16"	miter 45° at the head, square at the floor	Stick 2 (16 ft, 1' 3" left)
Colonial casing 3 1/4	R1 wall 2	Leg CO1	2	7' 3 7/16"	miter 45° at the head, square at the floor	Stick 3 (16 ft, 1' 3" left)
Colonial casing 3 1/4	R3 wall 2	Leg CO2	2	7' 3 7/16"	miter 45° at the head, square at the floor	Stick 4 (16 ft, 1' 3" left)
Colonial casing 3 1/4	R3 wall 2	Leg CO2	2	7' 3 7/16"	miter 45° at the head, square at the floor	Stick 5 (16 ft, 1' 3" left)
Colonial casing 3 1/4	R1 wall 1	Apron W1	1	3' 6 7/8"	returned	Stick 6 (16 ft, 1' 4 1/8" left)
Colonial casing 3 1/4	R1 wall 1	Head W1	1	3' 6 7/8"	miter 45° both ends	Stick 6 (16 ft, 1' 4 1/8" left)
Colonial casing 3 1/4	R1 wall 1	Apron W2	1	3' 6 7/8"	returned	Stick 6 (16 ft, 1' 4 1/8" left)
Colonial casing 3 1/4	R1 wall 1	Head W2	1	3' 6 7/8"	miter 45° both ends	Stick 6 (16 ft, 1' 4 1/8" left)
Colonial casing 3 1/4	R1 wall 3	Head ED1	1	3' 6 7/8"	miter 45° both ends	Stick 7 (16 ft, 1' 4 1/8" left)
Colonial casing 3 1/4	R1 wall 4	Apron W3	1	3' 6 7/8"	returned	Stick 7 (16 ft, 1' 4 1/8" left)
Colonial casing 3 1/4	R1 wall 4	Head W3	1	3' 6 7/8"	miter 45° both ends	Stick 7 (16 ft, 1' 4 1/8" left)
Colonial casing 3 1/4	R3 wall 1	Apron W4	1	3' 6 7/8"	returned	Stick 7 (16 ft, 1' 4 1/8" left)
Colonial casing 3 1/4	R3 wall 1	Head W4	1	3' 6 7/8"	miter 45° both ends	Stick 8 (16 ft, 1' 4 1/8" left)
Colonial casing 3 1/4	R3 wall 1	Apron W5	1	3' 6 7/8"	returned	Stick 8 (16 ft, 1' 4 1/8" left)
Colonial casing 3 1/4	R3 wall 1	Head W5	1	3' 6 7/8"	miter 45° both ends	Stick 8 (16 ft, 1' 4 1/8" left)
Colonial casing 3 1/4	R4 wall 1	Apron W7	1	3' 6 7/8"	returned	Stick 8 (16 ft, 1' 4 1/8" left)
Colonial casing 3 1/4	R1 wall 3	Leg ED1	2	6' 11 7/16"	miter 45° at the head, square at the floor	Stick 9 (16 ft, 1' 11" left)
Colonial casing 3 1/4	R2 wall 2	Leg D1	2	6' 11 7/16"	miter 45° at the head, square at the floor	Stick 10 (16 ft, 1' 11" left)
Colonial casing 3 1/4	R2 wall 2	Leg D1	2	6' 11 7/16"	miter 45° at the head, square at the floor	Stick 11 (16 ft, 1' 11" left)
Colonial casing 3 1/4	R2 wall 2	Leg CL1	2	6' 11 7/16"	miter 45° at the head, square at the floor	Stick 12 (16 ft, 1' 11" left)
Colonial casing 3 1/4	R2 wall 2	Leg D2	2	6' 11 7/16"	miter 45° at the head, square at the floor	Stick 13 (16 ft, 1' 11" left)
Colonial casing 3 1/4	R2 wall 2	Leg D2	2	6' 11 7/16"	miter 45° at the head, square at the floor	Stick 14 (16 ft, 1' 11" left)
Colonial casing 3 1/4	R3 wall 3	Leg D3	2	6' 11 7/16"	miter 45° at the head, square at the floor	Stick 15 (16 ft, 1' 11" left)
Colonial casing 3 1/4	R3 wall 3	Leg D3	2	6' 11 7/16"	miter 45° at the head, square at the floor	Stick 16 (16 ft, 1' 11" left)
Colonial casing 3 1/4	R4 wall 3	Leg ED2	2	6' 11 7/16"	miter 45° at the head, square at the floor	Stick 17 (16 ft, 1' 11" left)
Colonial casing 3 1/4	R1 wall 2	Head CO1	1	4' 6 7/8"	miter 45° both ends	Stick 18 (14 ft, 1/8" left)
Colonial casing 3 1/4	R2 wall 2	Head CL1	1	4' 6 7/8"	miter 45° both ends	Stick 18 (14 ft, 1/8" left)
Colonial casing 3 1/4	R3 wall 4	Apron W6	1	4' 6 7/8"	returned	Stick 18 (14 ft, 1/8" left)
Colonial casing 3 1/4	R4 wall 1	Head W7	1	3' 6 7/8"	miter 45° both ends	Stick 19 (14 ft, 1/8" left)
Colonial casing 3 1/4	R4 wall 3	Head ED2	1	3' 6 7/8"	miter 45° both ends	Stick 19 (14 ft, 1/8" left)

PREPARED BY

Sample Contracting Co.

100 Main St, Anytown

PROJECT

Living, dining and foyer stair

Client: Sample client

123 Example St

NOTICE

FOR ESTIMATING AND LAYOUT ONLY.
Not an engineered design. Code figures are defaults: verify with the building department. Verify dimensions in the field; saw settings are from the geometry: verify each with a test cut.

REVISIONS

REV	DATE	DESCRIPTION
0	10/18/2026	Issued for review

DATE
10/18/2026

SCALE
NTS

DRAWN BY
SC

SHEET SIZE
ANSI B (11" x 17")

SHEET TITLE
CUT LIST (2)

FC-13

CUT LIST: EVERY PIECE AT ITS LONG POINT, NESTED INTO 8, 10, 12, 14, 16 FT STOCK (+1" A PIECE)

PROFILE	WHERE	PIECE	QTY	LENGTH	ENDS	FROM
Colonial casing 3 1/4	R2 wall 2	Head D1	2	3' 2 7/8"	miter 45° both ends	Stick 19 (14 ft, 1/8" left)
Colonial casing 3 1/4	R3 wall 4	Head W6	1	4' 6 7/8"	miter 45° both ends	Stick 20 (14 ft, 7" left)
Colonial casing 3 1/4	R1 wall 1	Leg W1	2	4' 3 7/16"	miter 45° at the head, square at the floor	Stick 20 (14 ft, 7" left)
Colonial casing 3 1/4	R2 wall 2	Head D2	2	3' 2 7/8"	miter 45° both ends	Stick 21 (14 ft, 8 1/8" left)
Colonial casing 3 1/4	R3 wall 3	Head D3	2	3' 2 7/8"	miter 45° both ends	Stick 21 (14 ft, 8 1/8" left)
Colonial casing 3 1/4	R1 wall 1	Leg W2	2	4' 3 7/16"	miter 45° at the head, square at the floor	Stick 22 (14 ft, 10 1/2" left)
Colonial casing 3 1/4	R1 wall 4	Leg W3	1	4' 3 7/16"	miter 45° at the head, square at the floor	Stick 22 (14 ft, 10 1/2" left)
Colonial casing 3 1/4	R1 wall 4	Leg W3	1	4' 3 7/16"	miter 45° at the head, square at the floor	Stick 23 (14 ft, 10 1/2" left)
Colonial casing 3 1/4	R3 wall 1	Leg W4	2	4' 3 7/16"	miter 45° at the head, square at the floor	Stick 23 (14 ft, 10 1/2" left)
Colonial casing 3 1/4	R3 wall 1	Leg W5	2	4' 3 7/16"	miter 45° at the head, square at the floor	Stick 24 (14 ft, 10 1/2" left)
Colonial casing 3 1/4	R3 wall 4	Leg W6	1	4' 3 7/16"	miter 45° at the head, square at the floor	Stick 24 (14 ft, 10 1/2" left)
Colonial casing 3 1/4	R3 wall 4	Leg W6	1	4' 3 7/16"	miter 45° at the head, square at the floor	Stick 25 (14 ft, 10 1/2" left)
Colonial casing 3 1/4	R4 wall 1	Leg W7	2	4' 3 7/16"	miter 45° at the head, square at the floor	Stick 25 (14 ft, 10 1/2" left)
Backband 1 1/16	R1 wall 1	Backband head W1	1	3' 9"	miter 45° both ends	Stick 1 (16 ft, 7 5/8" left)
Backband 1 1/16	R1 wall 1	Backband head W2	1	3' 9"	miter 45° both ends	Stick 1 (16 ft, 7 5/8" left)
Backband 1 1/16	R1 wall 3	Backband head ED1	1	3' 9"	miter 45° both ends	Stick 1 (16 ft, 7 5/8" left)
Backband 1 1/16	R1 wall 4	Backband head W3	1	3' 9"	miter 45° both ends	Stick 1 (16 ft, 7 5/8" left)
Backband 1 1/16	R1 wall 2	Backband leg CO1	2	7' 4 1/2"	miter 45° at the head	Stick 2 (16 ft, 1' 0 7/8" left)
Backband 1 1/16	R1 wall 2	Backband leg CO1	2	7' 4 1/2"	miter 45° at the head	Stick 3 (16 ft, 1' 0 7/8" left)
Backband 1 1/16	R1 wall 2	Backband head CO1	2	4' 9"	miter 45° both ends	Stick 4 (16 ft, 1' 5 3/4" left)
Backband 1 1/16	R2 wall 2	Backband head CL1	1	4' 9"	miter 45° both ends	Stick 4 (16 ft, 1' 5 3/4" left)
Backband 1 1/16	R1 wall 3	Backband leg ED1	2	7' 0 1/2"	miter 45° at the head	Stick 5 (16 ft, 1' 8 7/8" left)
Backband 1 1/16	R2 wall 2	Backband leg D1	2	7' 0 1/2"	miter 45° at the head	Stick 6 (16 ft, 1' 8 7/8" left)
Backband 1 1/16	R2 wall 2	Backband leg D1	2	7' 0 1/2"	miter 45° at the head	Stick 7 (16 ft, 1' 8 7/8" left)
Backband 1 1/16	R2 wall 2	Backband leg CL1	2	7' 0 1/2"	miter 45° at the head	Stick 8 (16 ft, 1' 8 7/8" left)
Backband 1 1/16	R2 wall 2	Backband leg D2	2	7' 0 1/2"	miter 45° at the head	Stick 9 (16 ft, 1' 8 7/8" left)
Backband 1 1/16	R2 wall 2	Backband leg D2	2	7' 0 1/2"	miter 45° at the head	Stick 10 (16 ft, 1' 8 7/8" left)
Backband 1 1/16	R2 wall 2	Backband head D1	2	3' 5"	miter 45° both ends	Stick 11 (16 ft, 1' 11 5/8" left)
Backband 1 1/16	R2 wall 2	Backband head D2	2	3' 5"	miter 45° both ends	Stick 11 (16 ft, 1' 11 5/8" left)
Backband 1 1/16	R1 wall 1	Backband leg W1	2	4' 4 1/2"	miter 45° at the head	Stick 12 (14 ft, 7 1/4" left)
Backband 1 1/16	R1 wall 1	Backband leg W2	1	4' 4 1/2"	miter 45° at the head	Stick 12 (14 ft, 7 1/4" left)
Backband 1 1/16	R1 wall 1	Backband leg W2	1	4' 4 1/2"	miter 45° at the head	Stick 13 (14 ft, 7 1/4" left)
Backband 1 1/16	R1 wall 1	Backband leg W2	1	4' 4 1/2"	miter 45° at the head	Stick 13 (14 ft, 7 1/4" left)
Backband 1 1/16	R1 wall 4	Backband leg W3	2	4' 4 1/2"	miter 45° at the head	Stick 13 (14 ft, 7 1/4" left)
1x4 (3 1/2)	S1 Left wall	Stile	6	2' 6 3/4"	plumb cuts at the pitch	Stick 1 (16 ft, 7/8" left)
1x4 (3 1/2)	S1 Left wall	Stile	1	2' 6 3/4"	plumb cuts at the pitch	Stick 2 (16 ft, 1 3/8" left)
1x4 (3 1/2)	R3 wall 3	Bottom rail	1	2' 4 9/16"	square	Stick 2 (16 ft, 1 3/8" left)
1x4 (3 1/2)	R3 wall 3	Top rail	1	2' 4 9/16"	square	Stick 2 (16 ft, 1 3/8" left)
1x4 (3 1/2)	R3 wall 1	Stile	4	1' 11 3/4"	square	Stick 2 (16 ft, 1 3/8" left)
1x4 (3 1/2)	R3 wall 3	Top rail	1	8' 4 9/16"	square	Stick 3 (16 ft, 1 7/8" left)
1x4 (3 1/2)	S1 Left wall	Stile	2	2' 6 3/4"	plumb cuts at the pitch	Stick 3 (16 ft, 1 7/8" left)
1x4 (3 1/2)	R3 wall 1	Stile	1	1' 11 3/4"	square	Stick 3 (16 ft, 1 7/8" left)
1x4 (3 1/2)	R3 wall 4	Bottom rail	1	12'	square	Stick 4 (16 ft, 7 3/8" left)
1x4 (3 1/2)	R3 wall 2	Bottom rail	1	3' 2 9/16"	square	Stick 4 (16 ft, 7 3/8" left)
1x4 (3 1/2)	R3 wall 4	Top rail	1	12'	square	Stick 5 (16 ft, 7 3/8" left)
1x4 (3 1/2)	R3 wall 2	Bottom rail	1	3' 2 9/16"	square	Stick 5 (16 ft, 7 3/8" left)
1x4 (3 1/2)	R3 wall 3	Bottom rail	1	8' 4 9/16"	square	Stick 6 (16 ft, 11 1/8" left)
1x4 (3 1/2)	R3 wall 2	Top rail	2	3' 2 9/16"	square	Stick 6 (16 ft, 11 1/8" left)
1x4 (3 1/2)	R3 wall 1	Stile	7	1' 11 3/4"	square	Stick 7 (16 ft, 1' 6" left)
1x4 (3 1/2)	R3 wall 2	Stile	7	1' 11 3/4"	square	Stick 8 (16 ft, 1' 6" left)
1x4 (3 1/2)	R3 wall 3	Stile	7	1' 11 3/4"	square	Stick 9 (16 ft, 1' 6" left)
1x4 (3 1/2)	R3 wall 1	Bottom rail	1	14'	square	Stick 10 (16 ft, 1' 11" left)
1x4 (3 1/2)	R3 wall 1	Top rail	1	14'	square	Stick 11 (16 ft, 1' 11" left)
1x4 (3 1/2)	R3 wall 4	Stile	2	1' 11 3/4"	square	Stick 12 (8 ft, 3' 10 3/8" left)
Wainscot cap with a ledge	R3 wall 3	Cap	1	8' 4 9/16"	square	Stick 1 (16 ft, 1 1/8" left)
Wainscot cap with a ledge	R3 wall 4	Cap	2	3' 7 9/16"	square	Stick 1 (16 ft, 1 1/8" left)
Wainscot cap with a ledge	R3 wall 2	Cap	2	3' 2 9/16"	square	Stick 2 (16 ft, 1 1/2" left)
Wainscot cap with a ledge	R3 wall 3	Cap	1	2' 4 9/16"	square	Stick 2 (16 ft, 1 1/2" left)
Wainscot cap with a ledge	R3 wall 1	Cap	1	2' 3 1/8"	square	Stick 2 (16 ft, 1 1/2" left)
Wainscot cap with a ledge	R3 wall 1	Cap	2	2' 1 9/16"	square	Stick 2 (16 ft, 1 1/2" left)
Crown 4 5/8 (52/38)	S1 Left wall	Crown on the rake	1	16' 8 3/4"	joint details on the stair sheet	Stick 1 (16 ft, 0' left)
Crown 4 5/8 (52/38)	R4 wall 1	Crown	1	12'	coped / square	Stick 2 (16 ft, 7 7/8" left)
Crown 4 5/8 (52/38)	S1 Left wall	Crown (level)	1	3'	joint details on the stair sheet	Stick 2 (16 ft, 7 7/8" left)
Crown 4 5/8 (52/38)	R4 wall 3	Crown	1	12'	coped / square	Stick 3 (14 ft, 1' 11" left)
Crown 4 5/8 (52/38)	R4 wall 2	Crown	1	10'	coped / square	Stick 4 (12 ft, 1' 11" left)
Crown 4 5/8 (52/38)	R4 wall 4	Crown	1	10'	coped / square	Stick 5 (12 ft, 1' 11" left)

PREPARED BY

Sample Contracting Co.

100 Main St, Anytown

PROJECT

Living, dining and foyer stair

Client: Sample client

123 Example St

NOTICE

FOR ESTIMATING AND LAYOUT ONLY.
Not an engineered design. Code figures are defaults: verify with the building department. Verify dimensions in the field; saw settings are from the geometry: verify each with a test cut.

REVISIONS

REV	DATE	DESCRIPTION
0	10/18/2026	Issued for review

DATE
10/18/2026

SCALE
NTS

DRAWN BY
SC

SHEET SIZE
ANSI B (11" x 17")

SHEET TITLE
CUT LIST (3)

FC-14

CUT LIST: EVERY PIECE AT ITS LONG POINT, NESTED INTO 8, 10, 12, 14, 16 FT STOCK (+1" A PIECE)

PROFILE	WHERE	PIECE	QTY	LENGTH	ENDS	FROM
1x12 skirt board (11 1/4)	S1 Left wall	Skirt board	1	16' 8 3/4"	see the stair sheet	Stick 1 (16 ft, 0' left)
1x12 skirt board (11 1/4)	S1 Right open side	Skirt board	1	15' 7 3/8"	see the stair sheet	Stick 2 (16 ft, 1 5/8" left)
Raised panel	R3 wall 1	Panel	7	20" x 23 3/4"		raised panel
Raised panel	R3 wall 2	Panel	4	14 1/16" x 23 3/4"		raised panel
Raised panel	R3 wall 3	Panel	5	15 15/16" x 23 3/4"		raised panel
Raised panel	R3 wall 3	Panel	1	21 9/16" x 23 3/4"		raised panel
Raised panel	R3 wall 4	Panel	5	24 5/8" x 23 3/4"		raised panel
Raked panel	S1 Left wall	rectangle	1	30 3/4" wide x 23 3/4" plumb	square	raised panel
Raked panel	S1 Left wall	parallelogram	7	20 3/8" wide x 23 3/4" plumb	top and bottom at 32.80°	raised panel

PREPARED BY

Sample Contracting Co.

100 Main St, Anytown

PROJECT

Living, dining and foyer stair

Client: Sample client

123 Example St

NOTICE

FOR ESTIMATING AND LAYOUT ONLY.
Not an engineered design. Code figures are defaults: verify with the building department. Verify dimensions in the field; saw settings are from the geometry: verify each with a test cut.

REVISIONS

REV	DATE	DESCRIPTION
0	10/18/2026	Issued for review

DATE
10/18/2026

SCALE
NTS

DRAWN BY
SC

SHEET SIZE
ANSI B (11" x 17")

SHEET TITLE
CUT LIST (4)

FC-15

GENERAL NOTES

1. Verify all dimensions, openings, outlet and switch locations in the field before cutting. Quantities on the buy list are from the layouts shown.
2. Acclimate trim and panels in the heated building before install. Paint-grade: fill, caulk and sand ready for paint; stain-grade: tight joints, no caulk.
3. Inside corners of base, shoe, chair rail and crown are coped; outside corners are mitered and glued. Scarf joints over studs, not within 2 ft of a corner where avoidable.
4. Casing set with the reveal shown on the jamb; heads and legs as the casing style on the schedule. Window stools with horns past the casing, aprons returned.
5. Wall treatments as the elevations: battens and stiles plumb, laid out from the wall ends; panels, battens and box moldings kept off outlets and switches as shown.
6. Stairs: skirt boards scribed and notched per the notch layout; chair rail, panels and crown on the rake with the transitions and corners per the joint details. Saw settings are worked out from the geometry: verify each with a test cut.
7. Riser and tread checks use code defaults (IRC R311.7.5: 7 3/4 in. max riser, 10 in. min tread) to verify with the building department; this is not an engineered design.
8. R1 Living room: Traditional with crown package; 55.5 LF base, 55.5 LF shoe, 43.8 LF chair rail, 64 LF crown; 16 copes, 48 miter cuts.
9. R2 Hall: Traditional with crown package; 25 LF base, 25 LF shoe, 25 LF chair rail, 40 LF crown; 13 copes, 40 miter cuts.
10. R3 Dining room: Dining: raised panel wainscot package; 43.2 LF base, 43.2 LF shoe, 52 LF crown; 12 copes, 28 miter cuts.
11. R4 Foyer: Colonial package; 40.4 LF base, 40.4 LF shoe, 36.7 LF chair rail, 44 LF crown; 16 copes, 8 miter cuts.
12. S1 Main stair: 15 risers of 7 1/4" on 11 1/4" treads (32.80°); skirts notched over the treads and risers; joints J1, J2, J3, J4, J5, J6, J7, J8, J9, J10 on FC-7 and FC-8.
13. Stock lengths: 8, 10, 12, 14, 16 ft; 10% spare sticks on the buy list. The designer is a layout and estimating tool, not an engineered design.

PREPARED BY
Sample Contracting Co.
100 Main St, Anytown

PROJECT
Living, dining and foyer stair
Client: Sample client
123 Example St

NOTICE

FOR ESTIMATING AND LAYOUT ONLY.
Not an engineered design. Code figures are defaults: verify with the building department. Verify dimensions in the field; saw settings are from the geometry: verify each with a test cut.

REVISIONS

REV	DATE	DESCRIPTION
0	10/18/2026	Issued for review

DATE
10/18/2026

SCALE
NTS

DRAWN BY
SC

SHEET SIZE
ANSI B (11" x 17")

SHEET TITLE
NOTES

FC-16